


ORIGINAL-MANUSKRIFTET
TILL
MARCONIS
NOBELPRIS-FÖREDRAG

HÄLLET INFÖR
KUNGL. SVENSKA VETENSKAPSAKADEMIEN

DEN 11 DEC. 1909

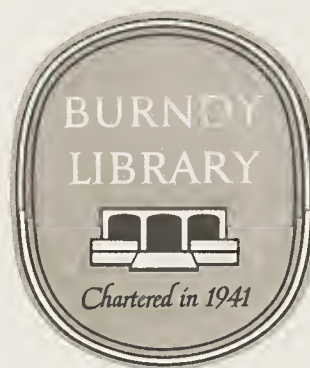

Gift of
BERN DIBNER



TILLHÖR
THOR THÖRNBLADS
STIFTELSE

SEDAN 12/11 1932.

*Lecture delivered at the Royal Academy of Science,
Stockholm, on 11th December, 1909,*

BY

COMMENDATORE G. MARCONI, LL.D., D.Sc.,

*On the occasion of the award to him of a Nobel Prize
for Physics.*

The discoveries connected with the propagation of electric waves over long distances, and the practical applications of telegraphy through space, which have gained for me the high honour of sharing the Nobel prize for Physics, have been made to a great extent the result of one another.

The application of electric waves to the purposes of wireless telegraphic communication between distant parts of the earth, and the experiments which I have been fortunate enough to carry out on a larger scale than is attainable in ordinary laboratories, have made it possible to investigate phenomena and note results often novel and unexpected.

In my opinion many facts connected with the

G. Marconi
10 Dec 1909



as shown in the drawing
the valve is closed
the valve is open

the valve is closed
the valve is open

the valve is closed
the valve is open
the valve is closed
the valve is open
the valve is closed
the valve is open
the valve is closed
the valve is open
the valve is closed
the valve is open

[Handwritten signature]
11/11/11

Transmission

~~propagation~~ of electric waves over great distances still await a satisfactory explanation, and I hope to be able in this Lecture to refer to some observations which appear to require the attention of physicists.

In sketching the history of my association with Radio Telegraphy, I might mention that I never studied Physics or electrotechnics in the regular manner, although as a boy I was deeply interested in those subjects.

I did however attend one course of lectures on Physics under the late Professor Rosa at Livorno, and I was *the publications of that time dealing with* what I might say fairly well acquainted with scientific subjects, including the works of Hertz, Branly and Righi.

At my home near Bologna in Italy I commenced early in 1895 to carry out tests and experiments with the object of determining whether it would be possible by means of Hertzian

the character of electric waves over great distances still

remains a very unsolved problem, and I am sure that it will

be one of the great problems of the future.

It is the object of this paper to

present the history of my association with

radio telegraphy, and to show that I have studied

the subject of electrostatics in the most thorough manner, although

it is a subject which is not generally understood.

I am sure that the study of electricity on

the subject of electrostatics will be of great value to me

and I am sure that the study of electricity will be of great value to me

including the study of static, dynamic and electric.

At the same time, I am sure that the study of electricity

is one of the most important subjects with the object of

generalizing the results of the study of electricity.

waves to transmit to a distance telegraphic signs and symbols without the aid of connecting wires.

After a few preliminary experiments with Hertzian Waves I became very soon convinced that if these waves or similar waves could be reliably transmitted and received over considerable distances a new system of communication would become available possessing enormous advantages over Flashlights and optical methods, which are so much dependant for their success on the clearness of the atmosphere.

My first tests were carried out with an ordinary Hertz oscillator and a Branly coherer as detector, but I soon found out that the Branly coherer was far too erratic and unreliable for practical work.

was to transmit at a distance telegraphic signals and symbols

without the aid of connecting wires.

After a few preliminary experiments with Hertzian

waves I became very soon convinced that in these waves or

radiations would be reliably transmitted and received

over considerable distances a new system of communication

would become available possessing enormous advantages over

existing and practical methods, which are so many

dependent for their use on the clearance of the

atmosphere.

My first tests were carried out with an ordinary

Hertz oscillator and a fairly coherent receiver, but I soon

found out that the fairly coherent was too erratic and

unreliable for practical work.

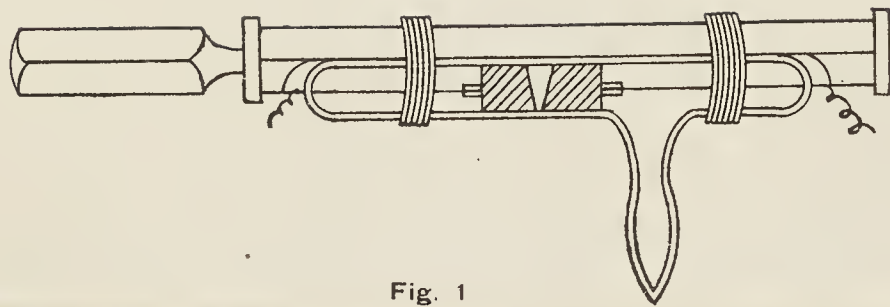


Fig. 1

After some experiments I found that a coherer constructed as shown in Fig. / and consisting of nickel and silver filings placed in a small gap between two silver plugs in a tube was remarkably sensitive and reliable. This improvement together with the inclusion of the coherer in a circuit tuned to the wave length of the transmitted radiation allowed me to gradually extend up to about a mile the distance at which I could affect the receiver.

Another now well known arrangement which I adopted was to place the coherer in a circuit containing a voltaic cell and a sensitive telegraph relay actuating another circuit which worked a tapper or trembler and a recording instrument. By means of a morse telegraphic key placed in one of the circuits of the oscillator or transmitter it was possible to emit long or short successions of electric

After some experiments I found that a coherer

constructed as shown in Fig. 1 and consisting of nickel and silver filings placed in a small gap between two silver pins in a tube was remarkably sensitive and reliable. This im-

provement together with the provision of the coherer in a circuit tuned to the wave length of the transmitted radiation allowed me to gradually extend up to about a mile the distance at which I could detect the receiver.

Another now well known arrangement which I

adopted was to place the coherer in a circuit containing a

variable self and a sensitive telegraphic relay actuating

another circuit which worked a tapet or trembler and a

recording instrument. By means of a Morse telegraphic key

placed in one of the circuits of the oscillator or transmitter

it was possible to emit long or short succession of electric

waves, which would affect the receiver at a distance and accurately reproduce the telegraphic signs transmitted through space by the oscillator.

With such apparatus I was able to telegraph up to a distance of about half a mile.

Some further improvements were obtained by using reflectors with both the transmitters and receivers, the transmitter being in this case a Righi oscillator.

This arrangement made it possible to send signals in one definite direction, but was inoperative if hills or any large obstacle happened to intervene between the transmitters and receivers.

In August 1895 I hit upon a new arrangement which not only greatly increased the distance over which I could

waves, which would affect the receiver at a distance and accurately reproduce the telegraphic signs transmitted through space by the oscillator.

With such apparatus I was able to telegraph up to a distance of about half a mile.

Some further improvements were obtained by using reflectors with both the transmitters and receivers, the transmitter being in this case a Rignol oscillator.

This arrangement made it possible to send signals in one definite direction, but was ineffective if hills or any large obstacle intervened between the transmitter and receiver.

In August 1880 I put upon a new arrangement which not only greatly increased the distance over which I could

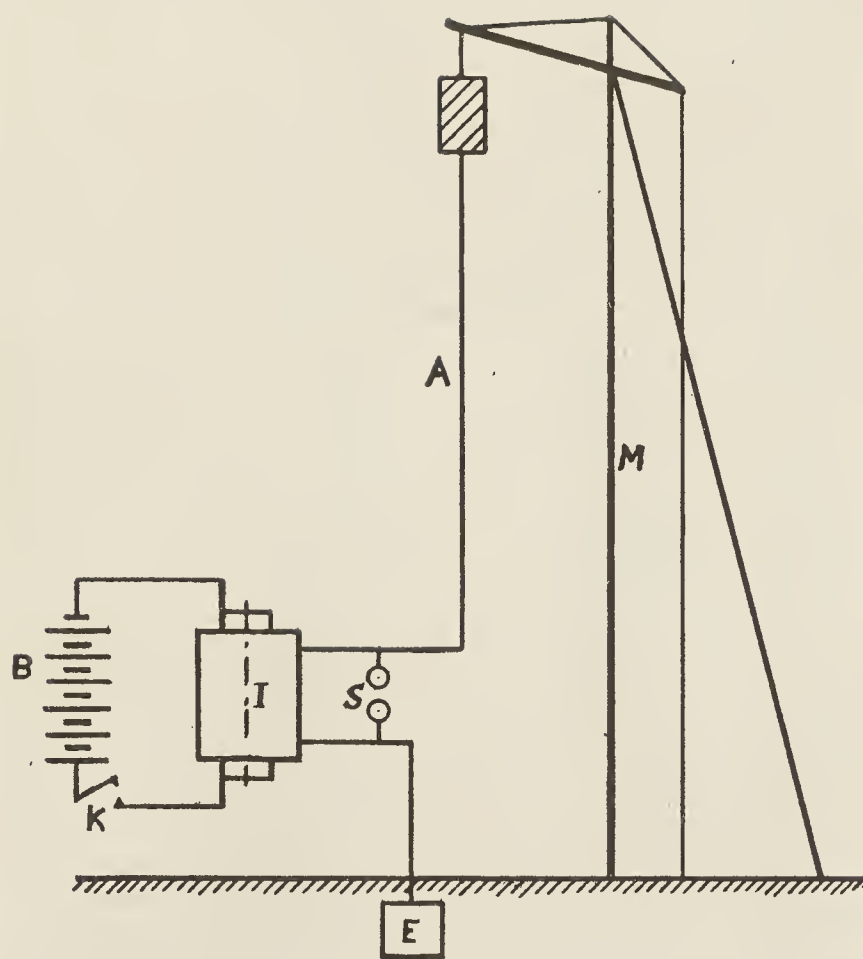


Fig. 2

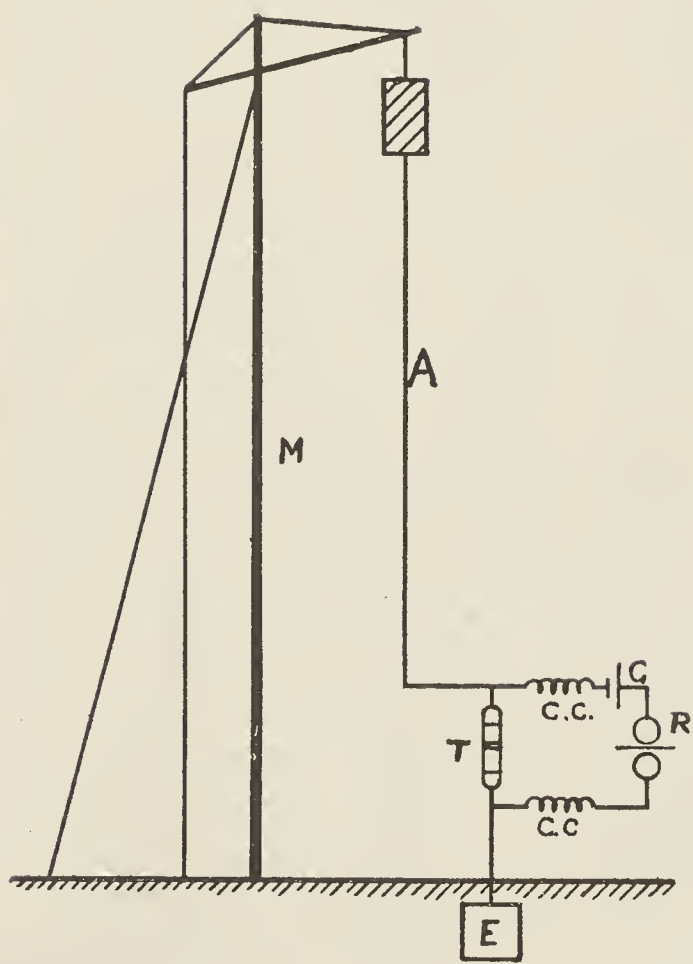


Fig. 3

communicate but also seemed to make the transmission independent from the effects of intervening obstacles.

This arrangement consisted in connecting one terminal of the Hertzian oscillator, or spark producer to earth and the other terminal to a wire or capacity aerea placed at a height above the ground and in also connecting at the receiving end one terminal of the coherer to earth and the other to an elevated conductor. *Fig 2 and 3.*

I then began to examine the relation between the distance at which the transmitter could affect the receiver and the elevation of the capacity aereas above the earth, and I very soon definitely ascertained that the higher the wires or capacity aereas the greater the distance over which it was possible to telegraph.

Thus I found that when using cubes of tin of about

communicate but also seemed to make the transmission independent from the effects of intervening obstacles.

This arrangement consisted in connecting one terminal of the Hertzian oscillator, or spark producer to earth and the other terminal to a wire or capacity series placed at a height above the ground and in also connecting at the receiving end one terminal of the coherer to earth and the other to an elevated conductor.

I then began to examine the relation between the distance at which the transmitter could affect the receiver and the elevation of the capacity series above the earth, and I very soon definitely ascertained that the higher the wires or capacity series the greater the distance over which it was possible to telegraph.

Thus I found that when using cubes of tin of about

30 cms. side as elevated conductors or capacities placed at the top of poles 2 meters high. I could receive signals at 30 meters' distance, and when placed on poles 4 meters high at 100 meters, at 8 meters high at 400 meters. With larger cubes 100 cms. side fixed at a height of 8 meters signals could be transmitted 2400 meters all round. *

These experiments were continued in England, where in September 1896 a distance of $1\frac{3}{4}$ miles was obtained in tests carried out for the British Government at Salisbury. The distance of communication was extended to 4 miles in March 1897 and in May of the same year to 9 miles.

In all these experiments a very small amount of electrical power was used, the high tension current being produced by an ordinary Rhumkoff coil.

The results obtained attracted a good deal of

* See Journal of the Institution of Electrical Engineers London
1899 Vol XXVIII page 278.

30 cms. side as elevated conductors or capacitors placed at
the top of poles 8 meters high I could receive signals at
30 meters' distance, and when placed on poles 4 meters high
at 100 meters, at 8 meters high at 400 meters. With larger
coils 100 cms. side fixed at a height of 8 meters signals
could be transmitted 2400 meters all round. *

These experiments were continued in England, where
in September 1896 a distance of $1\frac{1}{4}$ miles was obtained in tests
carried out for the British Government at Salisbury. The
distance of communication was extended to 4 miles in March
1897 and in May of the same year to 9 miles.

In all these experiments a very small amount of
electrical power was used, the high tension current being
produced by an ordinary Ruhmkorff coil.

The results obtained attracted a good deal of

* in France 2000 meters - 1896
1897 2000 meters - 1897

public attention at the time, such distances of communication being considered remarkable.

As I have explained the main feature in my system consisted in the use of elevated capacity aereas or vertical wires attached to one pole of the high frequency oscillators and receivers, the other pole of which was earthed.

The practical value of this innovation was not understood by many physicists for quite a considerable period, and the results which I obtained were by many erroneously considered simply due to efficiency in details of construction of the receiver, and to the employment of a large amount of energy in the transmitter.

Others did not overlook the fact that a radical change had been introduced by making these elevated capacities and the eart form part of the high frequency

public attention at the time, such distances of communication
being considered remarkable.

As I have explained the main feature in my system
consisted in the use of elevated capacity series or vertical
wires attached to one pole of the high frequency oscillators
and receivers, the other pole of which was earthed.

The practical value of this invention was not
understood by many physicists for quite a considerable
period, and the results which I obtained were by many
erroneously considered simply due to efficiency in details
of construction of the receiver, and to the employment of a
large amount of energy in the transmitter.

Others did not overlook the fact that a radical
change had been introduced by making these elevated
capacities and the earth form part of the high frequency

oscillators and receivers.

Professor Ascoli of Rome gave a very interesting theory of the mode of operation of my transmitters and receivers in the *Elettricista*, Rome, ^{issue of} August 1897, in which he correctly attributed the results obtained to the use of elevated wires or antennas.

Professor A. Slaby of Charlottenburg, after witnessing my tests in England in 1907 came to somewhat similar conclusions.

*

Many technical writers have stated that an elevated capacity at the top of the vertical wire is

*. see A. Slaby - Die Funkentelegraphie
Berlin 1892 Verlag von Leonhard Simion.
also A. Slaby - "The New Telegraphy". The Century Magazine
April 1898 vol 55 p 867.

unnecessary.

This is true if the length or height of the wire is made sufficiently great, but as this height may be much smaller for a given distance if a capacity aerea is used, it is more economical to use such capacities, which now usually consist of ^{a ~~small~~ number of} wires spreading out from the top of the vertical conductor.

The necessity or utility of the earth connection has been sometimes questioned, but in my opinion no practical system of Wireless Telegraphy exists where the instruments are not connected to earth.

By "connected to earth" I do not necessarily mean an ordinary metallic connection as used for ordinary wire telegraphs.

unnecessary.

This is true if the length or height of the wire is made sufficiently great, but as this height may be much smaller for a given distance if a capacity series is used, it is more economical to use such capacities, which now usually consist of wires spreading out from the top of the vertical conductor.

The necessity or utility of the earth connection has been sometimes questioned, but in my opinion no practical system of wireless telegraphy exists where the instruments are not connected to earth.

I do not necessarily mean an ordinary metallic connection as used for ordinary wire telegraphs.

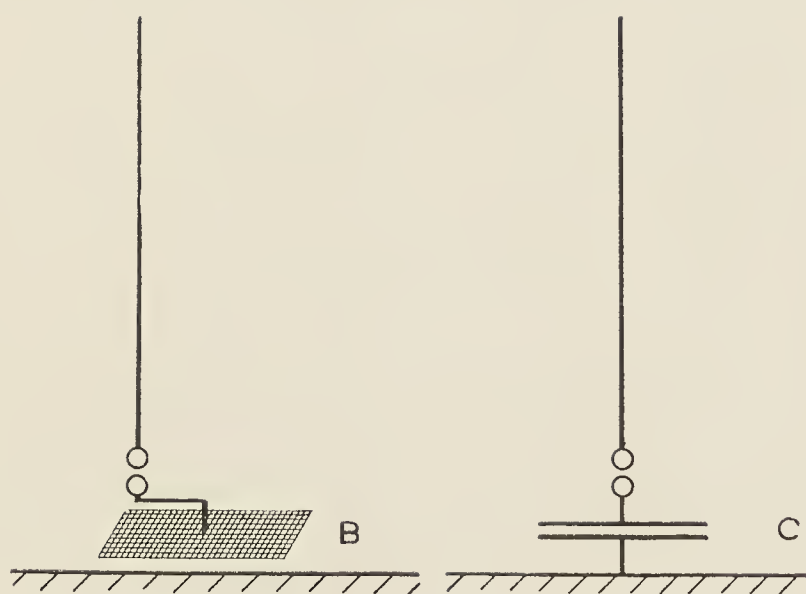


Fig. 4



Fig. 5

The earth wire may have a condenser in series with it or it may be connected to what is really equivalent a capacity aerea placed close to the surface of the ground.

Fig. 4

It is now perfectly well known that a condenser, if large enough, does not prevent the passage of high frequency oscillations, and therefore in these cases the earth is for all practical purposes connected to the antennae.

After numerous tests and demonstrations in Italy and in England over distances varying up to 40 miles, communication was established for the first time across the English Channel between England and France in March 1899. *Fig 5. **

From the beginning of 1898 I had practically abandoned the system of connection shown in Fig. 2 and instead of joining the coherer or detector directly to the aerial and earth, I connected it between the ends of the

** see Journal of the Institution of Electrical Engineers
1899 London Vol XXVIII p 291*

The earth wire may have a condenser in series with

it or it may be connected to what is really equivalent
capacity series placed close to the surface of the ground.

It is now perfectly well known that a condenser,

if large enough, does not prevent the passage of high

frequency oscillations, and therefore in these cases the earth
is for all practical purposes connected to the antennae.

After numerous tests and demonstrations in Italy

and in Ireland over distances varying up to 40 miles, communi-

cation was established for the first time across the English

Channel between England and France in March 1896.

From the beginning of 1896 I had practically

replaced the system of induction shown in Fig. 2 and

instead of joining the receiver or detector directly to the

aerial and earth, I connected it between the ends of the

It is found that the system of induction is superior to the system of direct connection in all respects.

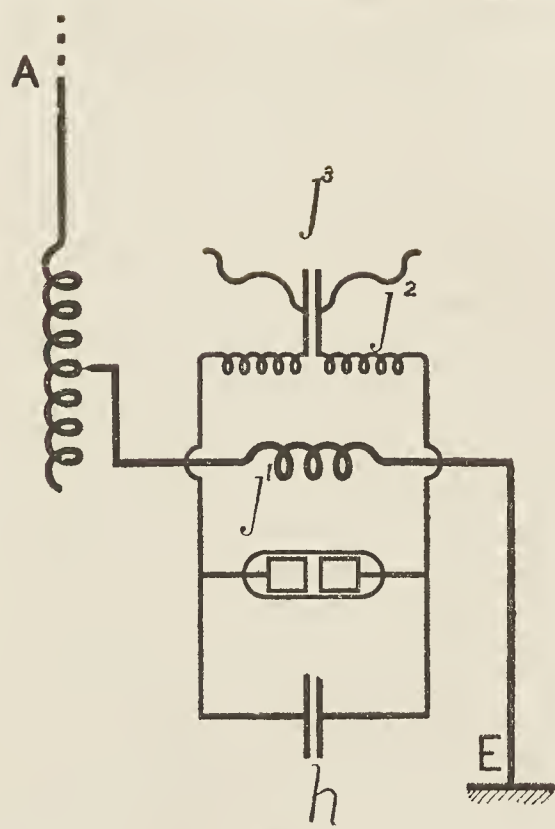


Fig. 6

secondary of a suitable oscillation transformer containing a condenser and tuned to the period of the electrical waves received. The primary of this oscillation transformer was connected to the elevated wire and to earth. *Fg 6*

This arrangement allowed of a certain degree of syntony, as by varying the period of oscillation of the transmitting antennae, it was possible to send messages to a tuned receiver without interfering with others differently syntonized. *

As is now well known a transmitter consisting of a vertical wire discharging through a spark gap is not a persistent oscillator, the radiation it produces is strongly damped. Its electrical capacity is comparatively so small and its capability of radiating energy so large that its oscillations decrease or die off with great rapidity. In this case receivers or resonators of a considerably different

* ~~In patent~~ *Etat* British patent No 12.326
of June 1 - 1898; also No 6482 of April 1 - 1899.

secondary of a suitable oscillator transformer containing
a condenser and tuned to the period of the electrical waves
received. The primary of this oscillator transformer was
connected to the elevated wire and to earth.

This arrangement allowed of a certain degree of
synchrony, and by varying the period of oscillation of the
transmitting antenna, it was possible to send messages to a
tuned receiver without interfering with others differently
synchronized.

As is now well known a transmitter consisting of
a vertical wire discharging through a spark gap is not a
persistent oscillator, the radiation it produces is strongly
damped. Its electrical capacity is comparatively so small
and its capability of radiating energy so large that its
oscillations decrease or die off with great rapidity. In this
case receivers or resonators of a considerably different

*to be used in the future No. 12.32
of June 1-1898; also No. 12.32 of June 1-1898.*

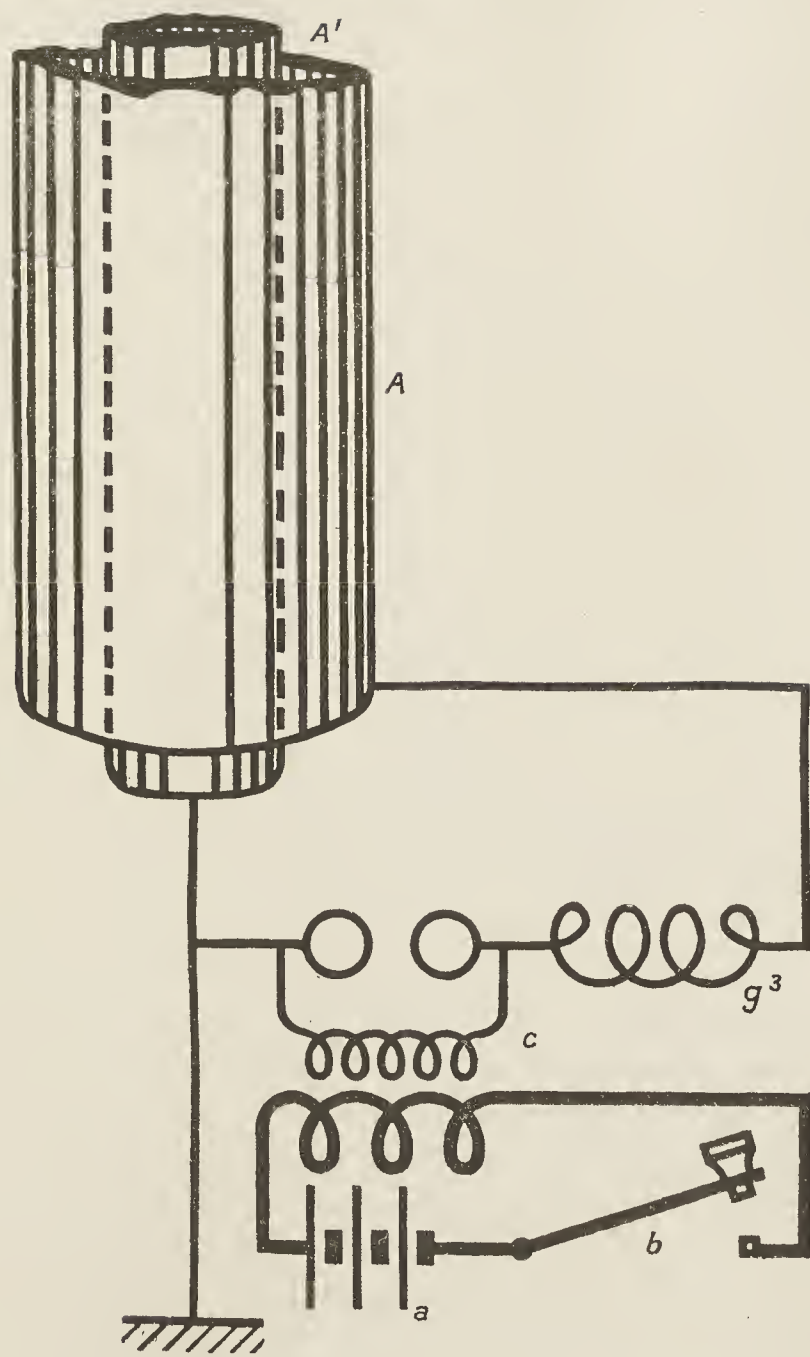


Fig. 7

period or pitch are likely to be affected by it.

Early in 1899 I was able to improve the resonance effects obtainable by increasing the capacity of the elevated wires by placing adjacently to them earthed conductors, and inserting in series with the aeriels suitable inductance coils. *

By these means the energy storing capacity of the aerial was increased, whilst its capability to radiate was decreased with the result that the energy set in motion by the discharge formed a train or succession of feebly damped oscillations.

A modification of this arrangement, by which excellent results were obtained, is shown in Fig. 7

In 1900 I constructed and patented transmitters which consisted of the usual kind of elevated capacity aerea

* In *État actuel et progrès de la Télégraphie Sans Fil*
 by A Blondel and G Ferrié, read at the
 Congrès International d'Electricité Paris. 1900.

period or pitch are likely to be affected by it.

Early in 1889 I was able to improve the resonance effects obtainable by increasing the capacity of the elevated wires by placing adjacent to them earthed conductors, and inserting in series with the series suitable inductance

coils.

By these means the energy storing capacity of the series was increased, whilst its capability to radiate was decreased with the result that the energy set in motion by the discharge formed a train or succession of freely damped oscillations.

A modification of this arrangement, by which

excellent results were obtained, is shown in Fig.

In 1900 I constructed and patented transmitters which consisted of the usual kind of elevated capacity series

It is to be noted that the capacity of the series is increased by the addition of the earthed conductors, and the inductance is increased by the addition of the coils.

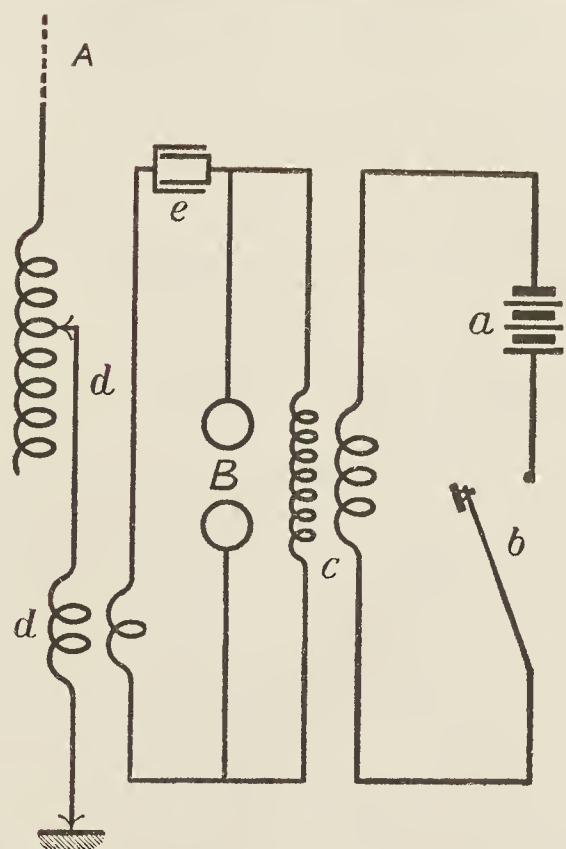


Fig. 8

and earth connection, but this was inductively coupled to an oscillation circuit containing a condenser an inductance and a spark gap, the conditions which I found essential for efficiency being that the periods of electrical oscillation of the elevated wire or conductor should be in tune or resonance with that of the condenser circuit. Fig. 8

X

The circuits consisting of the oscillating circuit and radiating circuit were more or less closely "coupled" by varying the distance between them. By the adjustment of the inductance inserted between the elevated conductor and earth, and by the variation of the capacity of the condenser circuit, the two circuits were brought into resonance, a condition which, as I have said, I found essential in order to obtain efficient radiation.

*utilization of condenser
regarding the association of
circuits in association with radiating
Part of my work on transmitters associated with antennae*

~~condensers~~ was carried out simultaneously to that of Professor

* See British Patent No 3737 26th of April 1900
also Journal of the Society of Arts Vol XLIX May 12. 1901 p 510-11

and earth connection, but this was inductively coupled to an
 oscillation circuit containing a condenser in inductance
 and a spark gap, the conditions which I found essential for
 efficiency being that the periods of electrical oscillation
 of the elevated wire or conductor should be in tune or
 resonance with that of the condenser circuit. Fig.

X

The circuits consisting of the oscillating circuit
 and radiating circuit were more or less closely "coupled" by
 varying the distance between them, by the adjustment of the
 inductance inserted between the elevated conductor and earth,
 and by the variation of the capacity of the condenser circuit,
 the two circuits were brought into resonance, a condition
 which, as I have said, I found essential in order to obtain
 efficient radiation.

Part of my work on ~~transmission of radio waves~~
 was carried out simultaneously to that of Professor

Braun, without however either of us knowing at the time anything of the contemporary work of the other.

A syntonic receiver is shown by Fig. 6 and consists also of a vertical conductor or aerial connected to earth through the primary of an oscillation transformer the secondary circuit of which included a condenser and a detector, it being necessary that the circuit containing the aerial and the circuit containing the detector should be in electrical resonance with each other, and also in tune with the periodicity of the electric waves transmitted from the sending station.

It is also possible to couple to one sending conductor several differently tuned transmitters and to a receiving wire a number of corresponding receivers, as is shown in Figs. 9 and 10 each individual receiver responding only to the radiations of the transmitter with which it is in resonance.

thing of the contemporary work of the other.
 frame, without however either of us knowing at the time any-

A synchronous receiver is shown by Fig. 1 and

consists also of a vertical conductor or aerial connected to
 earth through the primary of an oscillation transformer the
 secondary circuit of which included a condenser and a
 detector, it being necessary that the circuit containing the
 aerial and the circuit containing the detector should be in
 electrical resonance with each other, and also in tune with
 the periodicity of the electric waves transmitted from the
 sending station.

It is also possible to couple to one sending

conductor several differently tuned transmitters and to a
 receiving wire a number of corresponding receivers, as is
 shown in Figs. 2 and 3 each individual receiver
 responding only to the radiation of the transmitter with
 which it is in resonance.

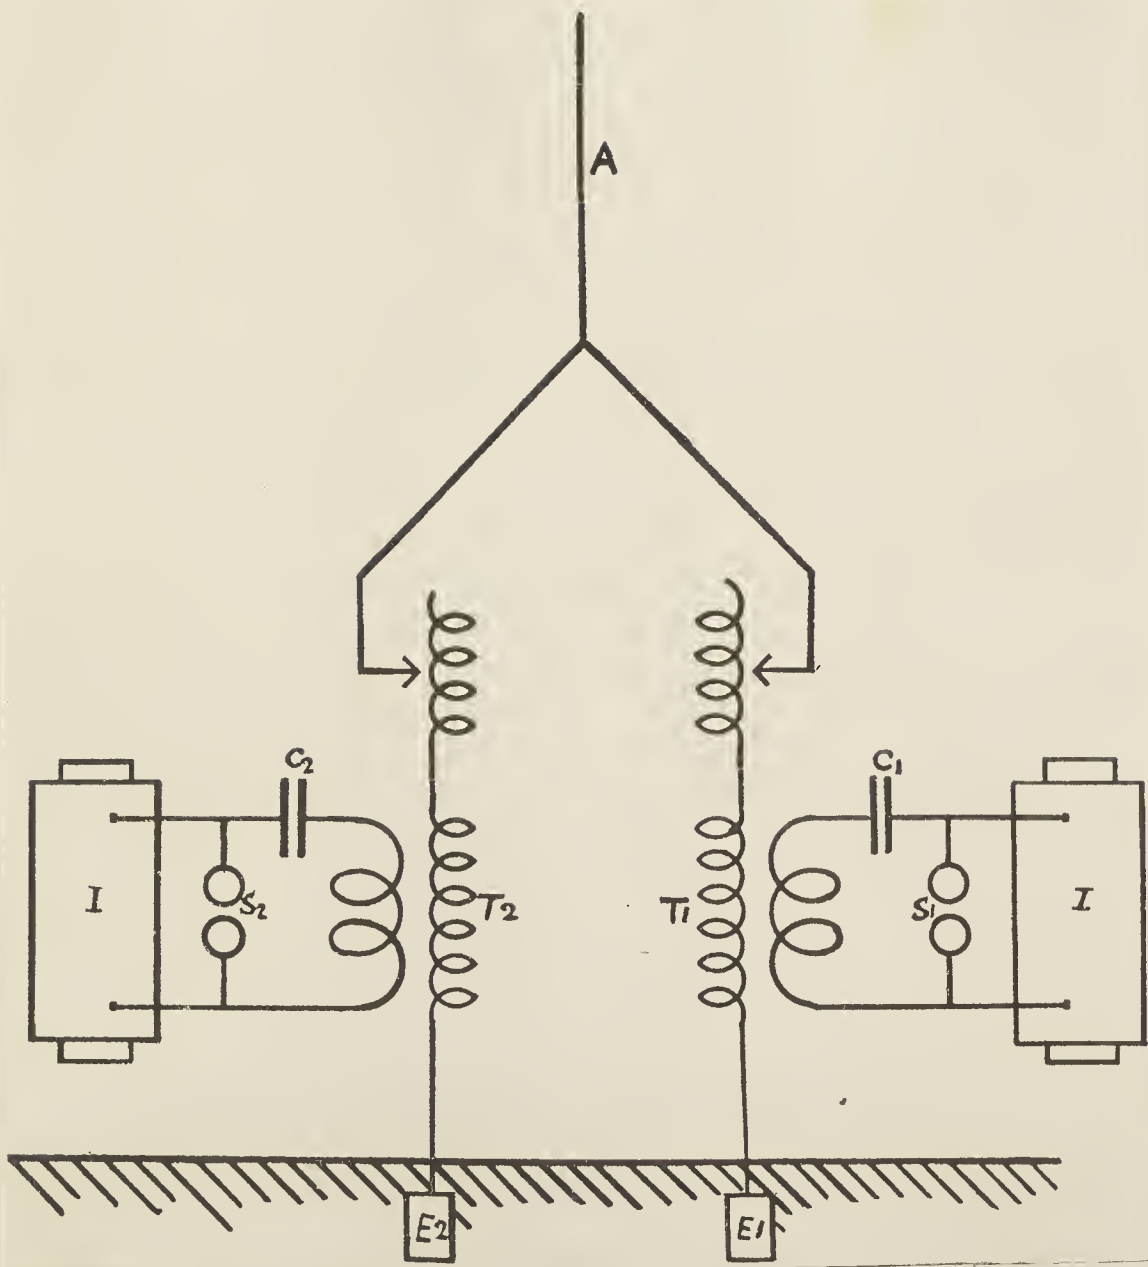


Fig. 9

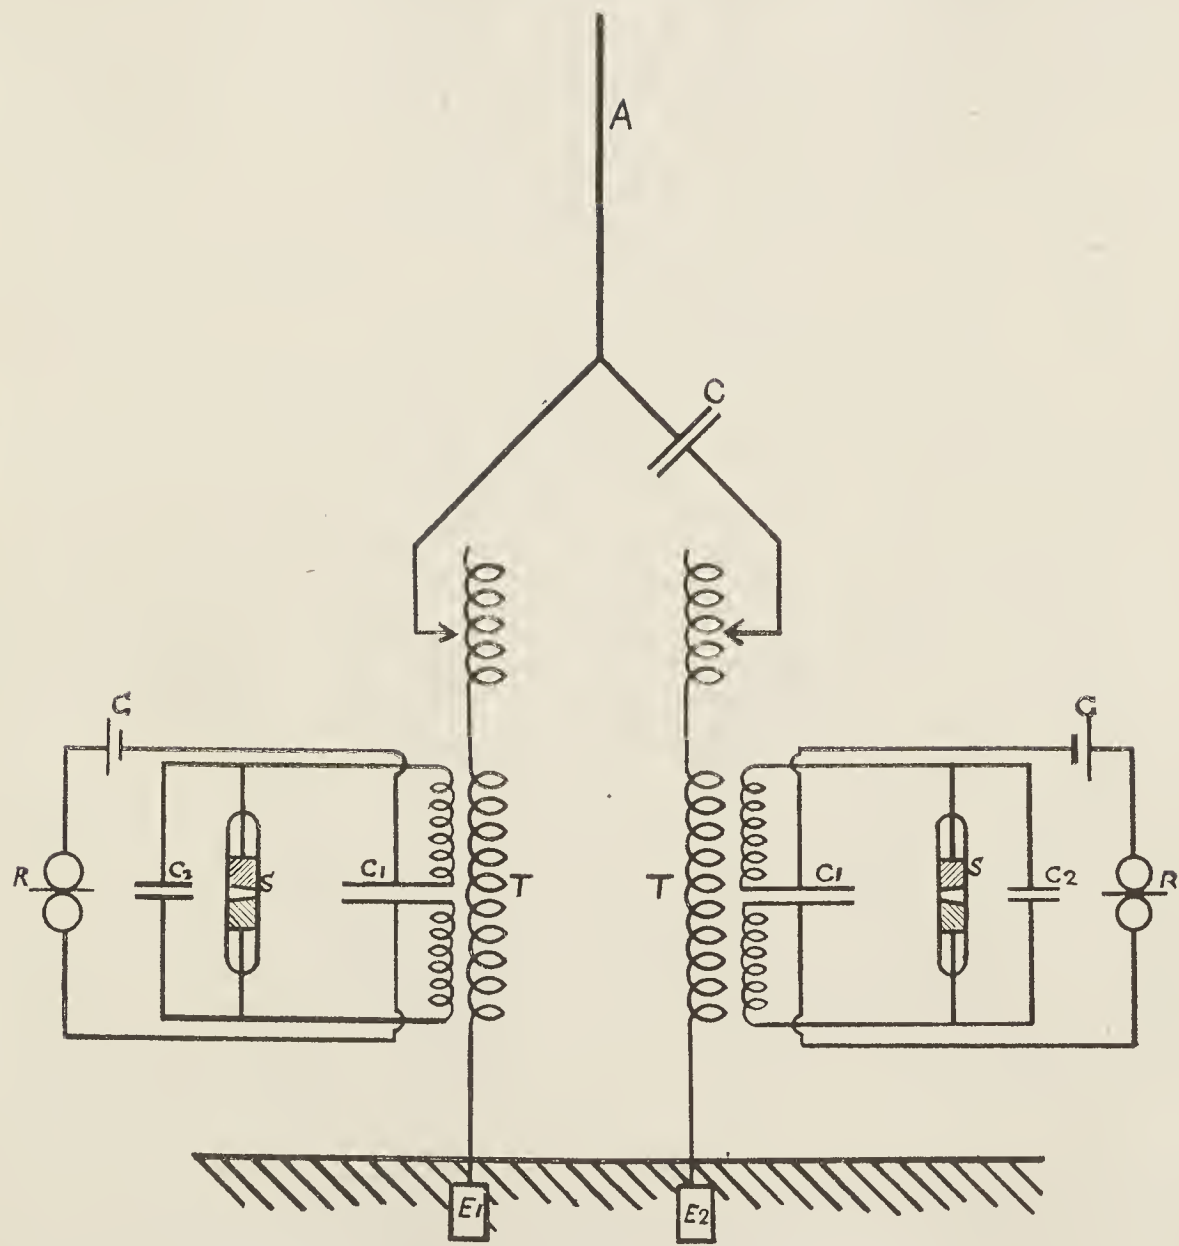


Fig. 10

At the time (twelve years ago) when communication was first established by means of Radio-telegraphy between England and France much discussion and speculation took place as to whether or not Wireless Telegraphy would be practicable for much longer distances than those then covered, and a somewhat general opinion prevailed that the curvature of the earth would be an insormountable obstacle to long distance transmission, in the same way as it was, and is, an obstacle to signalling over considerable distances by means of light flashes.

Difficulties were also anticipated as to the possibility of being able to control the large amount of energy which appeared would be necessary to cover long distances.

What often happens in pioneer work repeated itself in the case of Radio-telegraphy, - the anticipated obstacles or difficulties were either purely imaginery or else easely surmountable, but in their place unexpected barriers manifested themselves, and recent work has been mainly directed

At the time (twelve years ago) when communication was first established by means of Radio-telegraphy between England and France much discussion and speculation took place as to whether or not Wireless Telegraphy would be practicable for much longer distances than those then covered, and a somewhat general opinion prevailed that the curvature of the earth would be an insurmountable obstacle to long distance transmission, in the same way as it was, and is, an obstacle to signalling over considerable distances by means of light flashes.

Difficulties were also anticipated as to the possibility of being able to control the large amount of energy which appeared would be necessary to cover long distances.

What often happens in pioneer work repeated itself in the case of Radio-telegraphy, - the anticipated obstacles or difficulties were either purely imaginary or else easily surmountable, but in their place unexpected barriers manifested themselves, and reserve work has been mainly directed

to the solution of problems presented by difficulties which were certainly ^{never} ~~not~~ expected² or anticipated when long distances were first attempted.

With regard to the presumed obstacle of the curvature of the earth, I am of opinion that those who anticipated difficulties in consequence of the shape of our planet had not taken sufficient account of the particular effect of the earth connection to both transmitter and receiver, which earth connection introduced effects of conduction which were generally at that time overlooked.

Physicists seemed to consider for a long time that Wireless Telegraphy was solely dependent on the effects of free Hertzian radiation through space, and it was years before the probable effect of the conductivity of the earth between the stations was satisfactorily considered or discussed.

Professor J. A. Fleming in his book on "The Principles of Electric Wave Telegraphy"^{*} gives diagrams showing

* *Lipman Green & Co London 1906. p 348*

to the solution of problems presented by the fact which
were certainly not expected or anticipated when long distances
were first attempted.

With regard to the presumed existence of the
curvature of the earth, I am of opinion that those who antici-
pated difficulties in consequence of the shape of our planet
had not taken sufficient account of the particular effect of
the earth connection to both transmitter and receiver, which
earth connection introduced effects of conduction which were
generally at that time overlooked.

Physicists seemed to consider for a long time that
Wireless Telegraphy was solely dependent on the effects of
free Hertzian radiation through space, and it was years before
the probable effect of the conductivity of the earth between
the stations was satisfactorily considered or discussed.

Professor J. A. Fleming in his book on "The
Principles of Electric Wave Telegraphy" gives diagrams showing

Handwritten notes at the bottom of the page, including the name "Fleming" and other illegible scribbles.

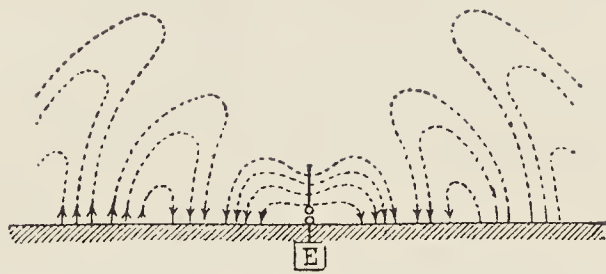


Fig. 11

what is now believed to be the diagrammatic representation of the detachment of semi-loops of electric strain from a simple vertical wire (Fig.//) As will be seen these waves do not propagate in the same manner as free radiation from a classical Hertzian oscillator, but glide along the surface of the earth.

Professor Fleming further states in the above quoted work:-

"The view we here take is that the ends of the semi-loops of electric force, which terminate perpendicularly on the earth, cannot move along unless there are movements of electrons in the earth corresponding to the wave-motions above it. From the point of view of the electronic theory of electricity, every line of electric force in the ether must be either a closed line or its ends must terminate on electrons of opposite sign. If the end of a line of strain abuts on the earth and moves, there must be atom-to-atom exchange of electrons, or

What is now believed to be the diagrammatic representation of the detachment of semi-loops of electric strain from a simple vertical wire (Fig. 1) As will be seen these waves do not propagate in the same manner as free radiation from a classical Hertzian oscillator, but glide along the surface of the earth.

Professor Fleming further states in the above quoted

work:-

"The view we here take is that the ends of the semi-loops of electric force, which terminate perpendicularly on the earth, cannot move along unless there are movements of electrons in the earth corresponding to the wave-motions above it. From the point of view of the electric theory of electricity, every line of electric force in the ether must be either a closed line or its ends must terminate on electrons of opposite sign. If the end of a line of strain shows on the earth and moves, there must be atom-to-atom exchange of electrons, or

"movements of electrons in it. We have many reasons
"for concluding that the substances we call conductors
"are those in which free movements of electrons can
"take place. Hence the movements of the semi-loops of
"electric force outwards from an earthed oscillator
"or Marconi Aerial is hindered by bad conductivity on
the surface of the earth and facilitated over the
"surface of a fairly good electrolyte, such as
"sea-water."

"movements of electrons in it. We have many reasons
 for concluding that the substances we call conductors
 are those in which free movements of electrons can
 take place. Hence the movements of the semi-loops of
 electric force outwards from an earthed oscillator
 for Marconi Aerial is hindered by bad conductivity on
 the surface of the earth and facilitated over the
 surface of a fairly good electrolyte, such as
 sea-water."

X

Professor Zenneck has carefully examined the effect of earthed transmitting and receiving aerials, and has endeavoured to show mathematically that when the lines of electrical force, constituting a wave front, pass along a surface of low specific inductive capacity, such as the earth, they become inclined forward, their lower ends being retarded by the resistance of the conductor to which they are attached. ~~Fig.~~

It therefore seems well established that Wireless Telegraphy, as practised at the present day, is dependent for its operation over long distances on the conductivity of the earth, and that the difference in conductivity between the surface of the sea and land is sufficient to explain the increased distance obtainable with the same amount of energy in communicating over sea as compared to over land.

I carried out some tests between a shore station and a ship at Poole in England in 1902 for the purpose of

* J. Zenneck. *Annalen der Physik* 23. 5 p. 846, Sept 1908
Physikal. Zeitschrift No. 2 p. 50; No. 13, p. 553.

Professor Zebeck has carefully examined the effect

of earthed transmission and receiving aerials, and has endeavoured to show mathematically that when the lines of electrical force, constituting a wave front, pass along a surface of low specific inductive capacity, such as the earth, they become inclined forward, their lower ends being retarded by the resistance of the conductor to which they are attached. Fig.

It therefore seems well established that Wireless

Telegraphy, as practised at the present day, is dependent for its operation over long distances on the conductivity of the earth, and that the difference in conductivity between the surface of the sea and land is sufficient to explain the increased distance obtainable with the same amount of energy in communication over sea as compared to over land. I carried out some tests between a shore station and a ship at Poole in England in 1908 for the purpose of

Handwritten notes at the bottom of the page, including a signature and date.

obtaining some data on this point, and I noticed that at equal distances a perceptible diminution in the energy of the received waves always occurred when the ship was in such a position as to allow a low spit of sand about 1 kilometer broad to intervene between it and the land station.

I therefore believe that there was some foundation for the statement so often criticised which I made in my first English Patent of the 2nd. June 1896 to the effect that when transmitting through the earth or water I connected one end of the transmitter and one end of the receiver to earth.

In January 1901 some successful experiments were carried out between two points on the South Coast of England 186 Miles apart, i.e. St. Catherine's Point (Isle of Wight) and The Lizard in Cornwall. ^{*} Fig. 12

The total height of these stations above sea level did not exceed 100 meters, whereas to clear the curvature of the earth a height of more than 1600 meters at each end would

*In Journal of the Society of Arts London.
Vol XLIX p 512 - 1901*

obtaining some data on this point, and I noticed that at equal

distances a perceptible diminution in the energy of the
received waves always occurred when the ship was in such a
position as to allow a low spit of sand about 1 kilometer
broad to intervene between it and the land station.

I therefore believe that there was some foundation
for the statement so often criticised which I made in my first
English Patent of the 2nd June 1896 to the effect that when
transmitting through the earth or water I connected one end
of the transmitter and one end of the receiver to earth.

In January 1901 some aerial experiments were
carried out between two points on the South Coast of England
180 miles apart, i.e. St. Catherine's Point (Isle of Wight)
and The Lizard in Cornwall, viz.

The total height of these stations above sea level
did not exceed 100 meters, whereas to clear the curvature of
the earth a height of more than 1800 meters at each end would

*Received by the Admiralty
on 1st July 1901*

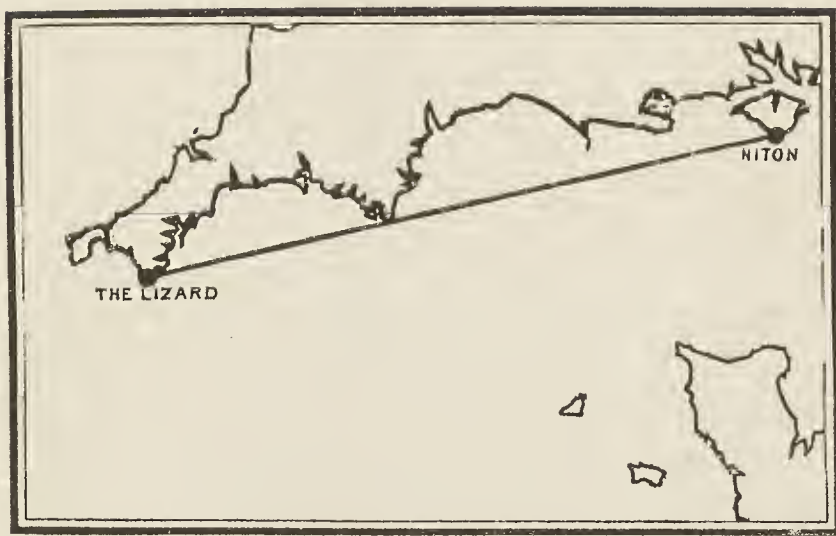


Fig. 12

have been necessary.

The results obtained from these tests, which at the time constituted a record distance, seemed to indicate that electric waves produced in the manner I had adopted would most probably be able to make their way ~~wound~~ around the curvature of the earth, and that therefore even at great distances, such as those dividing America from Europe, the factor of the earth's curvature would not constitute an insormountable barrier to the extension of Telegraphy through space.

The belief that the curvature of the earth would not stop the propagation of the waves, and the success obtained by syntonic methods in preventing mutual interference, led me in 1900 to decide to attempt the experiment of testing

have been necessary.

The results obtained from these tests, which at the

time constituted a record distance, seemed to indicate that

electric waves produced in the manner I had adopted would

most probably be able to make their way round the curvature

of the earth, and that therefore even at great distances,

such as those dividing America from Europe, the factor of the

earth's curvature would not constitute an insurmountable

barrier to the expansion of telegraphy through space.

The belief that the curvature of the earth would

not stop the propagation of the waves, and the success

obtained by synchro methods in preventing mutual interference,

led me in 1900 to decide to attempt the experiment of testing

whether or not it would be possible to detect electric waves over a distance of 4000 Kilometers, which, if succesful, would have immediately prooved the possibility of telegraphing without wires between Europe and America.

The experiment was in my opinion of great importance from a scientific point of view, and I was convinced that the discovery of the possibility to transmit electric waves across the Atlantic Ocean, and the exact knowledge of the real conditions under which telegraphy over such distances could be carried out, would do much to improve our understanding of phenomena connected with wireless transmission.

The transmitter erected at Poldhu on the Coast of Cornwall was similar in principle to the one I have already referred to, but on a very much larger scale than anything ~~that had been~~ previously attempted. x

The power of the generating plant was about 25 Kilowatts.

*At Royal Institution of Great Britain
Lecture by G. Marconi. June 13th 1902.*

whether or not it would be possible to detect electric waves over a distance of 4000 Kilometers, which, if successful, would have immediately proved the possibility of telegraphing without wires between Europe and America.

The experiment was in my opinion of great importance from a scientific point of view, and I was convinced that the discovery of the possibility to transmit electric waves across the Atlantic Ocean, and the exact knowledge of the real conditions under which telegraphy over such distances could be carried out, would do much to improve our understanding of phenomena connected with wireless transmission.

The transmitter erected at Poldhu on the Coast of Cornwall was similar in principle to the one I have already referred to, but on a very much larger scale than anything that had been previously attempted.

The power of the generating plant was about 20

Kilowatts.

*W. J. P. ...
... 1892*

Numerous difficulties were encountered in producing and controlling for the first time electrical oscillations of such power. In much of the work I obtained valuable assistance from Professor J. A. Fleming, Mr. R. N. Vyvyan and Mr. W.S. Entwistle.

My previous tests had convinced me that when endeavouring to extend the distance of communication, it was not merely sufficient to augment the power of the electrical energy of the sender, but that it was also necessary to increase the aerea or height of the transmitting and receiving elevated conductors.

As it would have been too expensive to employ vertical wires of great height, I decided to increase their number and capacity, which seemed likely to make possible the efficient utilization of large amounts of energy.

The arrangement of transmitting antennae which was

numerous difficulties were encountered in producing

and controlling for the first time electrical oscillations
of such power. In much of the work I obtained valuable assistance
from Professor J. A. Fleming, Mr. R. N. W. Vyvyan and Mr.
W. S. Rowland.

My previous tests had convinced me that when endeavouring
to extend the distance of communication, it was not
merely sufficient to augment the power of the electrical energy
of the sender, but that it was also necessary to increase
the area or height of the transmitting and receiving
elevated conductors.

As it would have been too expensive to employ vertical
wires of great height, I decided to increase their number
and capacity, which seemed likely to make possible the
efficient utilization of large amounts of energy.

The arrangement of transmitting antennae which was

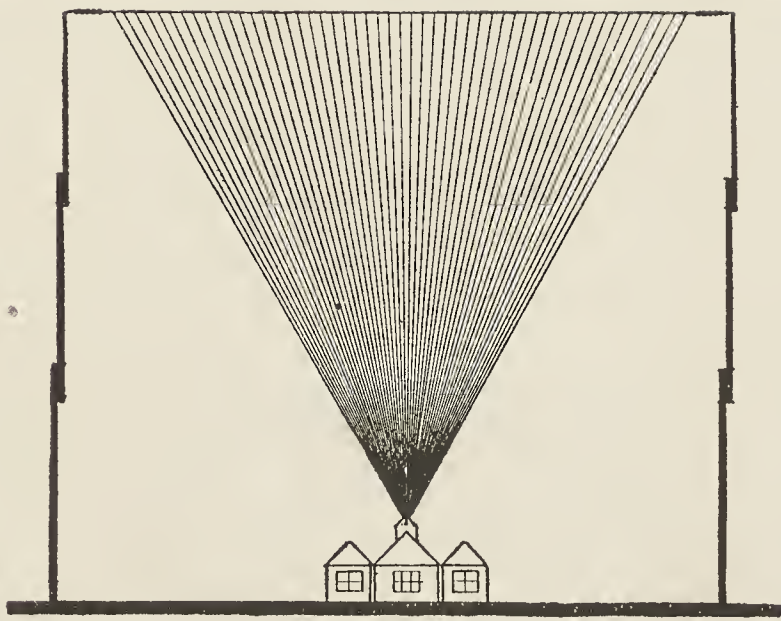


Fig. 13

used at Poldhu is shown in Fig. ¹³ and consisted of a fan-like arrangement of wires supported by an insulated stage between masts only 48 meters high and 60 meters apart. These wires converged together at the lower end and were connected to the transmitting apparatus contained in a building.

For the purpose of the test a powerful station had been erected at Cape Cod, near New York, but the completion of the arrangements at that station were delayed in consequence of a storm which destroyed the masts and antennae.

I Therefore decided to try the experiments by means of a temporary receiving station erected in Newfoundland, to which country I proceeded with two assistants about the end of November 1901.

The tests were commenced early in December 1901 and on the 12th. of that month the signals transmitted from England were clearly and distinctly received at the temporary station at St. John's in Newfoundland.

used at Point is shown in Fig. and consisted of a fan-

like arrangement of wires supported by an insulated tower between masts only 48 meters high and 60 meters apart. These wires connected together at the lower end and were connected to the transmitting apparatus contained in a building.

For the purpose of the test a powerful station had

been erected at Cape Cod, near New York, but the completion of the arrangements at that station were delayed in consequence of a storm which destroyed the masts and antennas.

I therefore decided to try the experiments by means

of a temporary receiving station erected in Newfoundland, to which country I proceeded with two assistants about the end of November 1901.

The tests were commenced early in December 1901

and on the 18th. of that month the signals transmitted from England were clearly and distinctly received at the temporary station at St. John's in Newfoundland.

**CERTIFIED TRACK CHART OF S.S. PHILADELPHIA. AMERICAN LINE.
SHEWING POINTS WHERE MR G. MARCONI RECEIVED MESSAGES FROM CORNWALL, ENGLAND.**

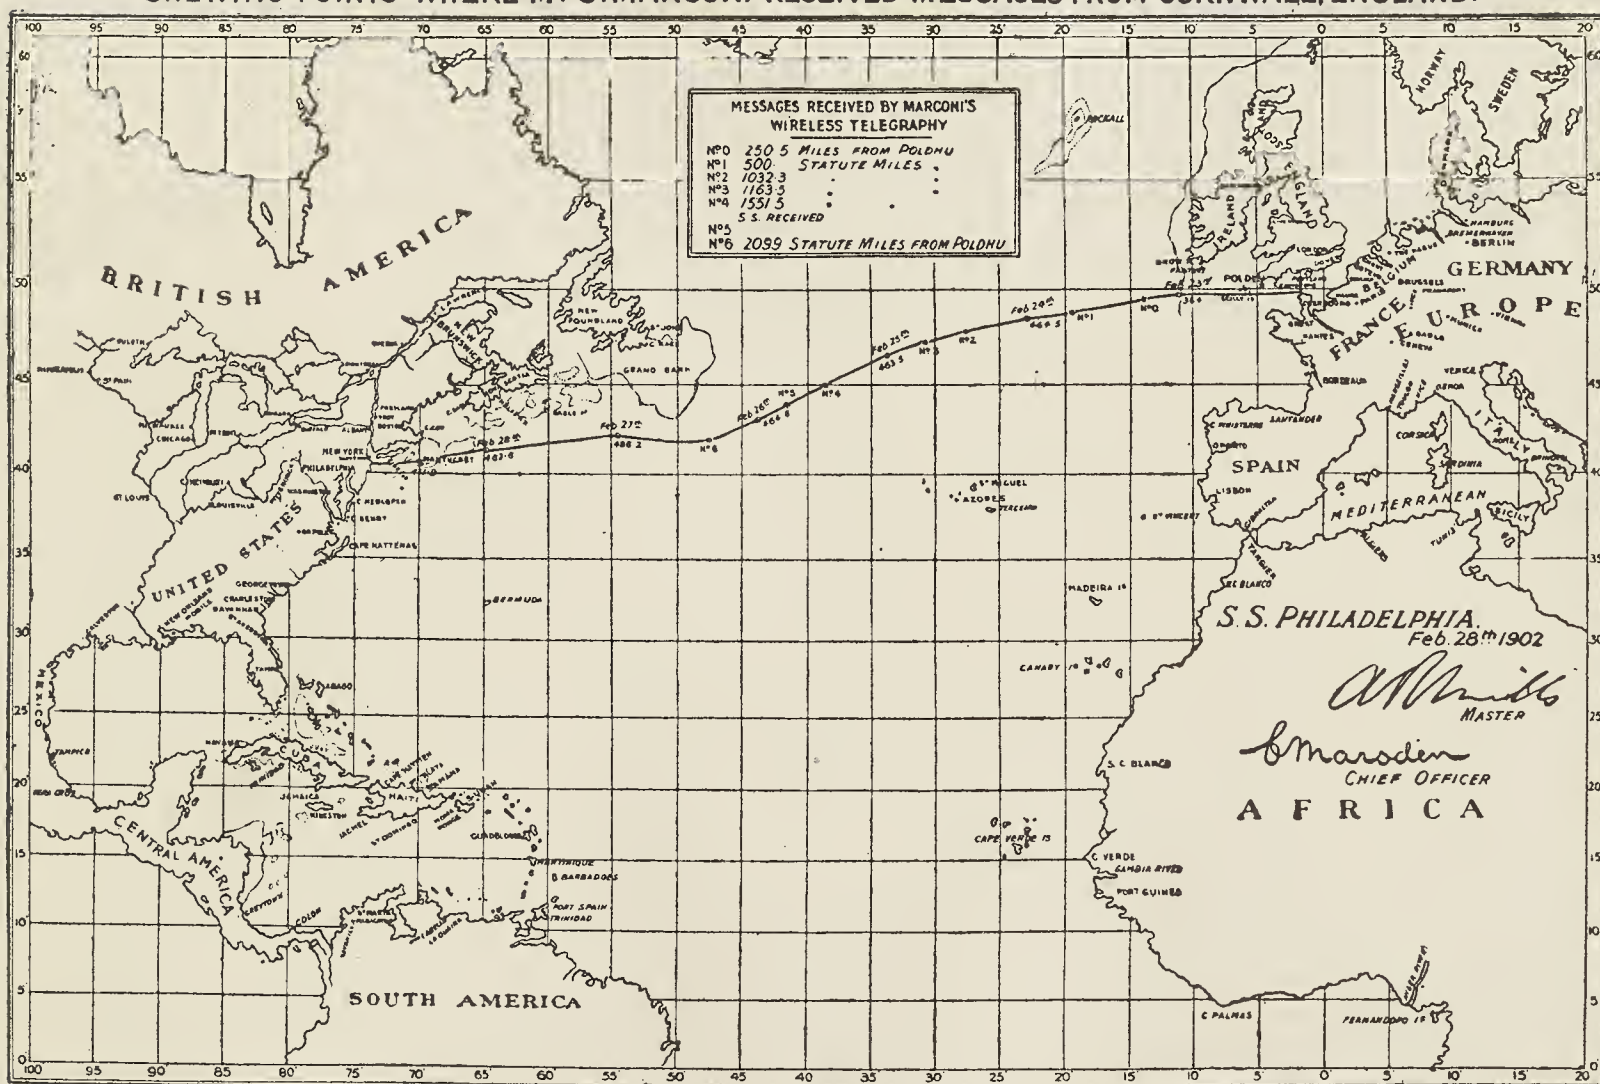


Fig. 14

Confirmatory tests were carried out in February 1902 between Poldhu and a receiving station on the S.S. "Philadelphia" of the American Line. On board this ship readable messages were received by means of a recording instrument up to a distance of 1551 Miles and test letters as far as 2099 Miles from Poldhu. *Fig 14*

The tape records obtained on the "Philadelphia" at the various distances were exceedingly clear and distinct as can be seen by the specimens I have exhibited.

These results, although achieved with imperfect apparatus, were sufficient to convince me and my co-workers that by means of permanent stations and the employment of sufficient power it would be possible to transmit messages across the Atlantic Ocean in the same way as they were sent over much shorter distances.

The tests could not be continued in Newfoundland

Continuously sent were carried out in February

1908 between Földes and a receiving station on the S.S.
"Philadelphia" of the American Line. On board this ship
readable messages were received by means of a recording
instrument up to a distance of 1000 Miles and test letters
as far as 2000 Miles from Földes.

The tape records obtained on the "Philadelphia"
at the various distances were exceedingly clear and distinct
as can be seen by the specimens I have exhibited.

These results, although achieved with imperfect
apparatus, were sufficient to convince me and my co-workers
that by means of permanent stations and the employment of
sufficient power it would be possible to transmit messages
across the Atlantic Ocean in the same way as they were sent
over much shorter distances.

The tests could not be continued in Newfoundland

owing to the hostility of a cable Company, which claimed all rights for telegraphy, whether wireless or otherwise, in that Colony.

A result of scientific interest which I first noticed during the tests on S.S. "Philadelphia" and which is a most important factor in long distance Radio-telegraphy, was the very marked and detrimental effect of daylight on the propagation of electric waves at great distances. The range by night being usually more than double that attainable during daytime. *

I do not think that this effect has yet been satisfactorily investigated or explained. At the time I carried out the tests I was of opinion that it might be due to the loss of energy at the transmitter, caused by the dis-electrification of the highly charged transmitting elevated conductor operated by the influence of sunlight.

I am now inclined to believe that the absorption of electric waves during daytime is due to the ionization

* In Proc of the Royal Society Vol 30
A Note on the Effect of Daylight upon the Propagation of
Electromagnetic Impulses. G. Marconi June 12th 1902.

owing to the hostility of a cable company, which claimed all rights for telegraphy, whether wireless or otherwise, in that colony.

A result of scientific interest which I first noticed during the tests on 2.2 Mps. "Lafayette" and which is a most important factor in long distance Radio-telegraphy, was the very marked and detrimental effect of daylight on the propagation of electric waves at great distances. The range by night being usually more than double that attainable during daytime.

I do not think that this effect has yet been satisfactorily investigated or explained. At the time I carried out the tests I was of opinion that it might be due to the loss of energy at the transmitter, caused by the ion-electrification of the highly charged transmitting elevated conductor operated by the influence of sunlight. I am now inclined to believe that the absorption of electric waves during daytime is due to the ionization

Handwritten notes at the bottom of the page, including "The effect of ionization on the propagation of electric waves during daytime is due to the ionization of the atmosphere by the influence of sunlight." and "The effect of ionization on the propagation of electric waves during daytime is due to the ionization of the atmosphere by the influence of sunlight."

of the gaseous molecules of the air affected by ultra-violet light, and as the ultra-violet rays, which emanate from the sun, are largely absorbed in the upper atmosphere of the earth, it is probable that the portion of the earth's atmosphere which is facing the sun will contain more ions or electrons than that portion which is in darkness, and therefore, as Sir J. J. Thomson has shown,^{*} this illuminated and ionized air will absorb some of the energy of the electric waves.

Apparently the length of wave and amplitude of the electrical oscillations have much to do with this interesting phenomena, long waves and small amplitudes being subject to the effect of daylight to a much lesser degree than short waves and large amplitudes.

According to Professor Fleming, the daylight effect should be more marked on long waves, but this has not been my experience. Indeed, in some very recent experiments in which waves about 8000 meters long were used, the energy received by day was usually greater than at night.

^{*} See Phil Mag August 1902 ser 6 vol 4 p. 253
J.J. Thomson. "On some consequences" etc.

of the gaseous molecules of the air affected by ultra-violet light, and as the ultra-violet rays, which emanate from the sun, are largely absorbed in the upper atmosphere of the earth, it is probable that the portion of the earth's atmosphere which is facing the sun will contain more ions or electrons than that portion which is in darkness, and therefore, as Sir J. J. Thomson has shown, this illuminated and ionized air will absorb some of the energy of the electric waves.

Apparently the length of wave and amplitude of the electrical oscillations have much to do with this interesting phenomena, long waves and small amplitudes being subject to the effect of daylight to a much lesser degree than short waves and large amplitudes.

According to Professor Fleming, the daylight effect should be more marked on long waves, but this has not been my experience. Indeed, in some very recent experiments in which waves about 8000 meters long were used, the energy received by day was usually greater than at night.

Handwritten notes at the bottom of the page, including the name "J. J. Thomson" and other illegible text.

The fact remains, however, that for comparatively short waves such as are used ^{for ship communication} by ~~ship~~ clear sunlight and blue skies, though transparent to light, act as a kind of fog to these waves. Hence the weather conditions prevailing in England, and perhaps in this Country, are usually suitable for Wireless Telegraphy.

During the year 1902 I carried out some further tests between the Station at Poldhu and a receiving installation erected on the Italian Cruiser "Carlo Alberto", kindly placed at my disposal by H.M. The King of Italy. * B 15

During these experiments the interesting fact was observed that even when using waves as short as 1000 feet, intervening ranges of mountains, such as the Alps or the Pyrenees, did not, during night time, bring about any considerable reduction in the distance over which it was possible to communicate. During daytime, unless much longer

* See Rivista Marittima, Rome, Oct 1902

The fact remains, however, that for comparatively short waves such as are used by the clear sunlight and blue skies, though transparent to light, act as a kind of fog to these waves. Hence the weather conditions prevailing in England, and perhaps in this country, are usually suitable for Wireless Telephony.


During the year 1902 I carried out some further tests between the station at Poldhu and a receiving installation erected on the Italian cruiser "Carlo Alberto", kindly placed at my disposal by H.M. The King of Italy.

During these experiments the interesting fact was observed that even when using waves as short as 1000 feet, intervening ranges of mountains, such as the Alps or the Pyrenees, did not, during night time, bring about any considerable reduction in the distance over which it was possible to communicate. During daytime, unless much longer

* The Wireless Telegraph, London, Oct 1902



Fig. 15

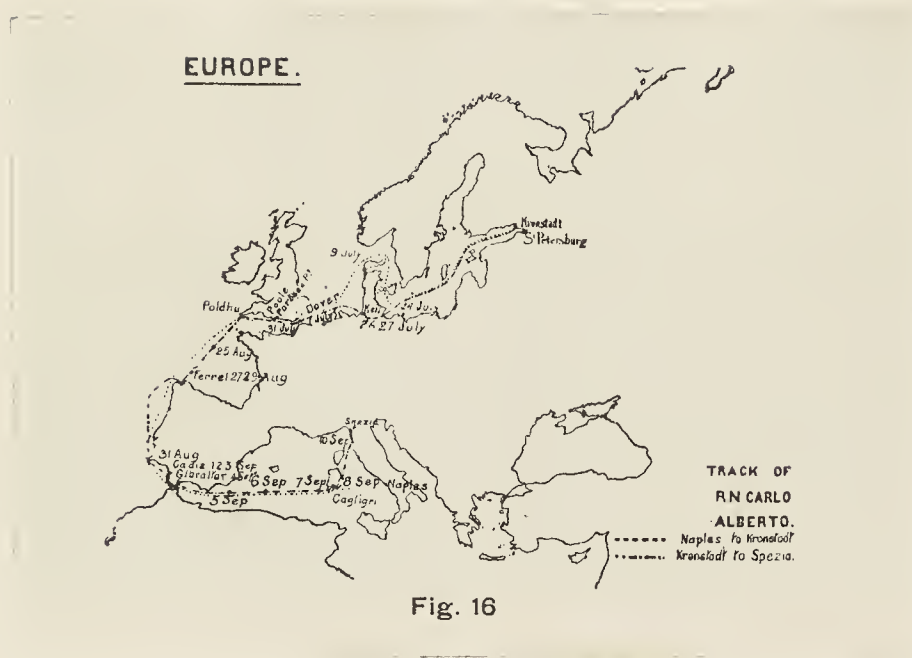

waves and more power were used, intervening mountains greatly reduced the apparent range of the transmitter.

Messages and Press Despatches of considerable length were received from Poldhu at the positions marked on the map, which map is a copy on a reduced scale of the one accompanying the official report of the experiments. — FS 16

With the active encouragement and financial assistance of the Canadian Government, a High Power Station was constructed at Glace Bay, Nova Scotia, in order that I should be able to continue my long-distance tests with a view to establishing radio-telegraphic communication on a commercial basis between England and America. *

On December 16th. 1902 the first official messages were exchanged at night across the Atlantic, between the Stations at Poldhu and Glace Bay. Figs 17 and 18.

Further tests were shortly afterwards carried out

* See paper read before Royal Institution of Great Britain
by G. Marconi March 3rd 1905.

waves and more power were used, interesting mountains
greatly reduced the apparent range of the transmitter.

Messages and Press Despatches of considerable length
were received from Folbun at the positions marked on the map,
which map is a copy on a reduced scale of the one accompanying
the official report of the experiments.

With the active encouragement and financial
assistance of the Canadian Government, a High Power Station
was constructed at Glace Bay, Nova Scotia, in order that it
should be able to continue its long-distance tests with a
view to establishing radio-telegraphic communication on a
commercial basis between England and America.

On December 15th, 1902 the first official messages
were exchanged at right angles to the Atlantic, between the
stations at Folbun and Glace Bay.

Further tests were shortly afterwards carried out

*It is noted that this station is located at Glace Bay
at Folbun, Nova Scotia, 1902.*

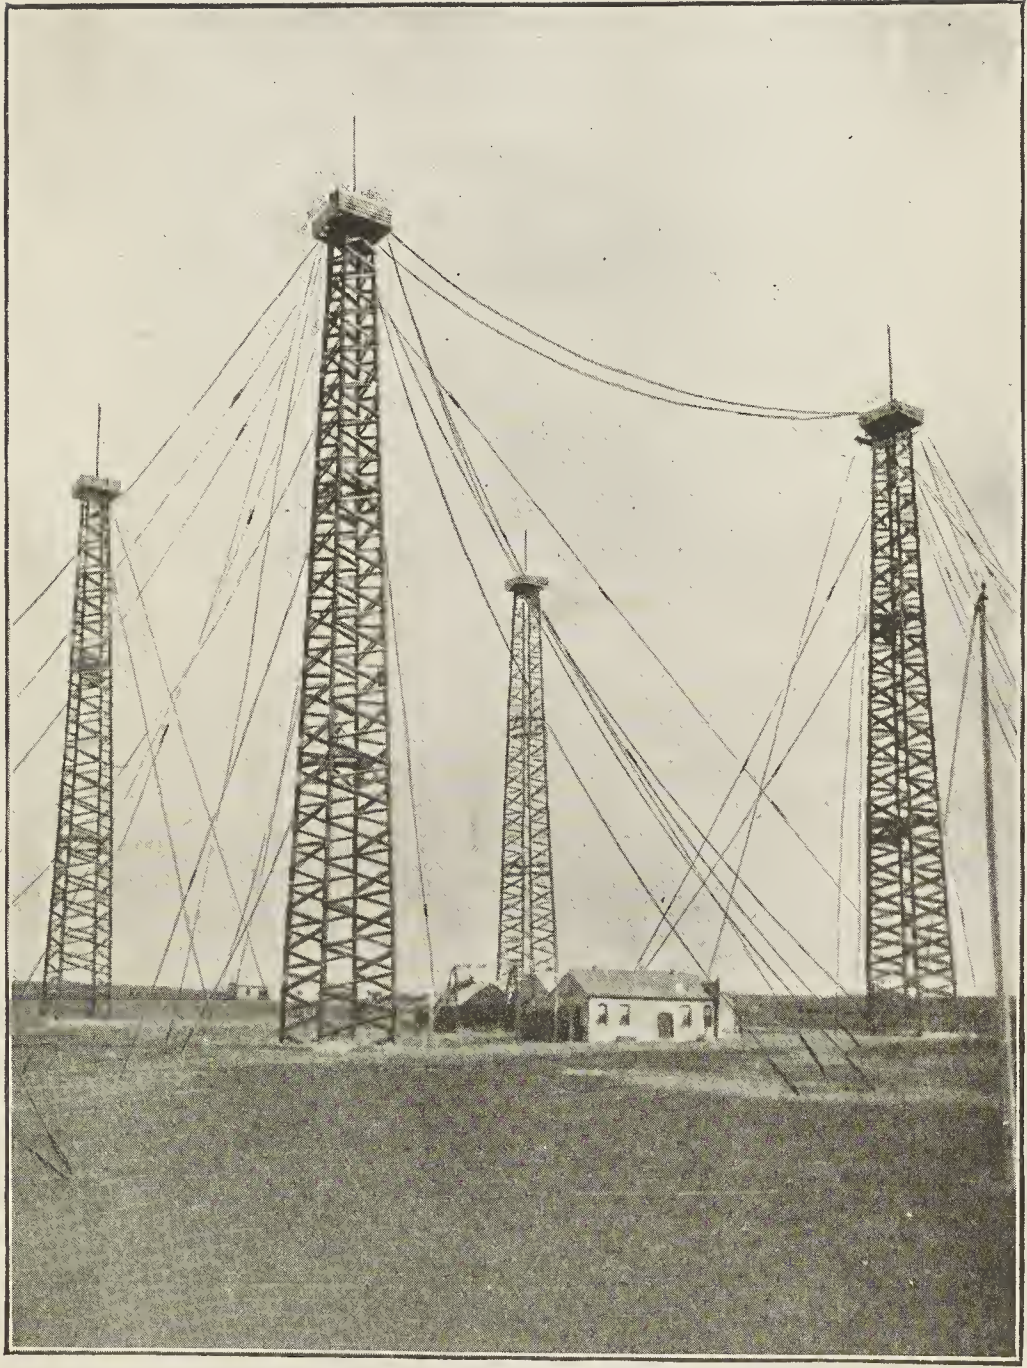


Fig. 17

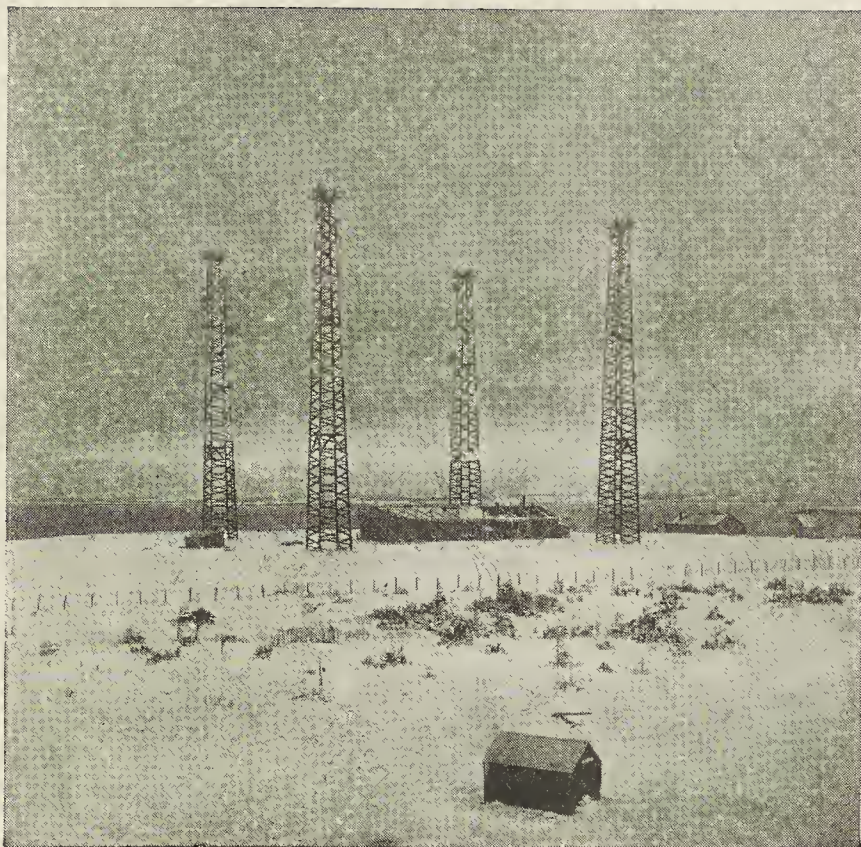


Fig. 18

with another long-distance station at Cape Cod in the United States of America, and under favourable circumstances it was found possible to transmit messages to Poldhu 3000 Miles away with an expenditure of electrical energy of only about 10 Kilowatts.

In the spring of 1903 the transmission of Press-Messages by Radio-telegraphy from America to Europe was attempted, and for a time the London "Times" published, during the latter part of March and the early part of April of that year, news messages from its' New York Correspondent sent across the Atlantic without the aid of Cables.

A breakdown in the insulation of the apparatus at Glace Bay made it necessary, however, to suspend the service, and unfortunately further accidents made the transmission of messages uncertain and unreliable.

As a result of the data and experience gained by

with another long-distance station at Cape Cod in the United States of America, and under favorable circumstances it was found possible to transmit messages to Faldun 3000 miles away with an expenditure of electrical energy of only about 10 Kilowatts.

In the spring of 1903 the transmission of Press-Messages by Radio-telegraphy from America to Europe was attempted, and for a time the London "Times" published during the latter part of March and the early part of April of that year, news messages from its New York Correspondent sent across the Atlantic without the aid of Cables.

A breakdown in the insulation of the apparatus at Glace Bay made it necessary, however, to suspend the service, and unfortunately further accidents made the transmission of messages uncertain and unreliable. As a result of the data and experience gained by

these and other tests which I carried out for the British Government, between England and Gibraltar, I was able to erect a new station at Clifden in Ireland, and enlarge the one at Glace Bay in Canada, so as to enable me to initiate, in October 1907, communication for commercial purposes across the Atlantic between England and Canada.

Although the stations at Clifden and Glace Bay had to be put into operation before they were altogether complete, nevertheless communication across the Atlantic by Radio-telegraphy, never suffered any serious interruption during nearly two years, until, in consequence of a fire at Glace Bay in August of this year, it has had to be suspended for about three months.

This suspension has not, however, been altogether an unmitigated evil, as it has given me the opportunity of installing more efficient and up to date machinery.

The arrangements of elevated conductors or aerials

these and other tests which I carried out for the British Government, between England and Gibraltar, I was able to erect a new station at Clifden in Ireland, and enlarge the one at Glace Bay in Canada, so as to enable me to initiate, in October 1907, communication for commercial purposes across the Atlantic between England and Canada.

Although the stations at Clifden and Glace Bay had to be put into operation before they were altogether complete, nevertheless communication across the Atlantic by Radio-telegraphy, never suffered any serious interruption during nearly two years, until, in consequence of a fire at Glace Bay in August of this year, it has had to be suspended for about three months.

This suspension has not, however, been altogether unmitigated evil, as it has given me the opportunity of installing more efficient and up to date machinery.

The first remnants of elevated conductors or series

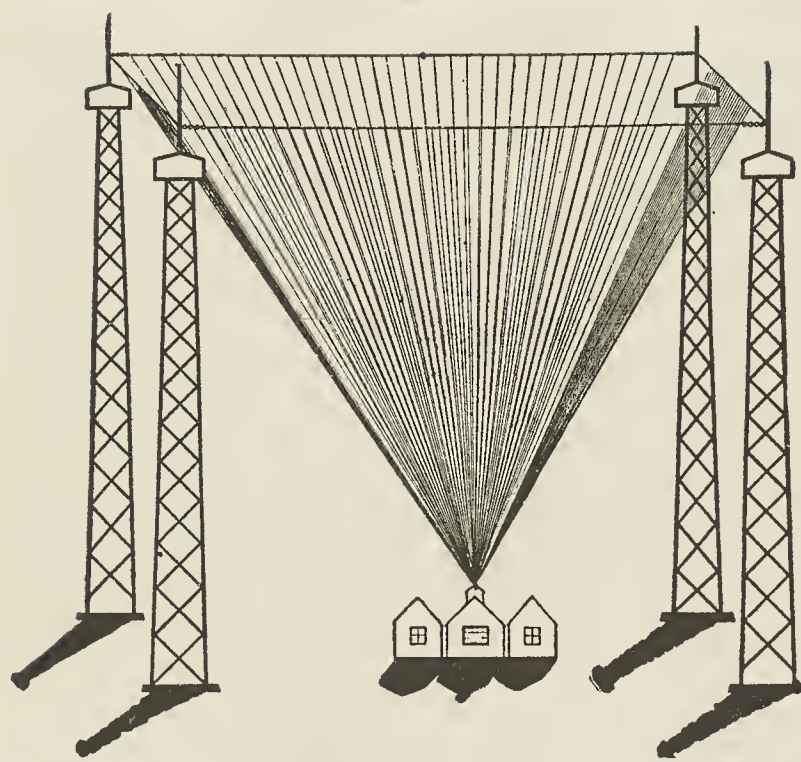


Fig. 19

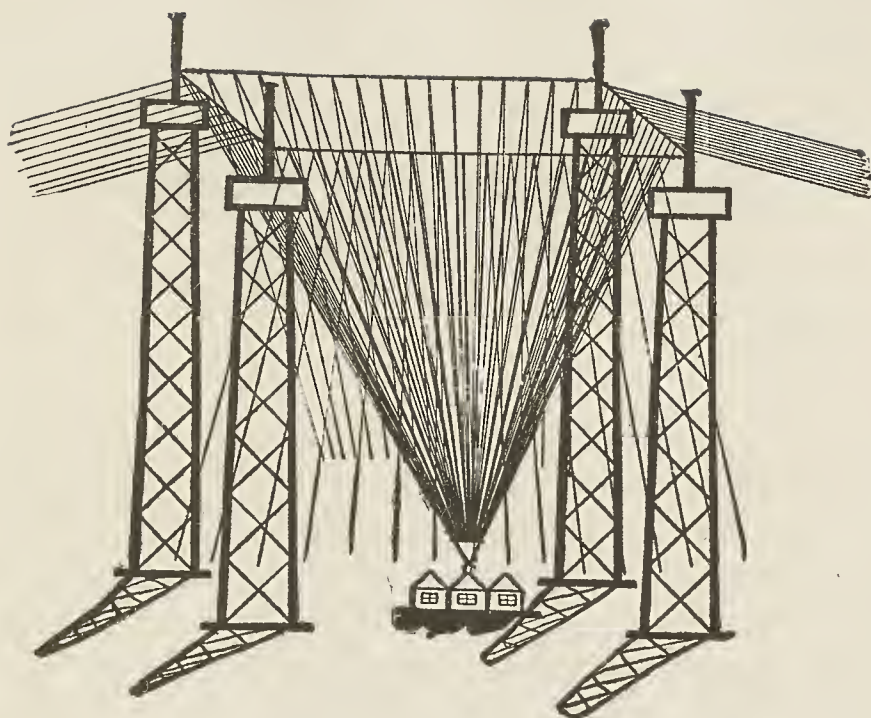


Fig. 20

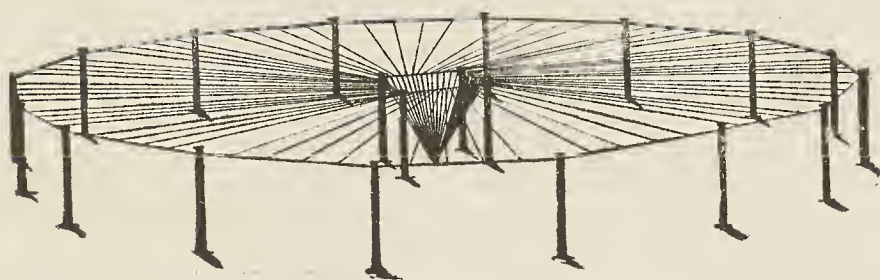


Fig. 21

which I have tried during my long-distance tests, are shown in Figs. 19, 20, 21

The aerial shown in Fig. 21 consisted of a vertical portion in the middle 200 feet wide 220 feet long supported by four towers and attached at the top to nearly horizontal wires 200 in number and each 1000 feet long, extending radially all round and supported at a height of 180 feet from the ground by an inner circle of 8 and an outer circle of 16 masts.

The natural period of oscillation of this aerial system gave a wave length of 12.000 feet. Experiments were made with this arrangement in 1905 and with a wave length of 12.000 signals, although very weak, could be received across the Atlantic by day as well as by night.

The system of aerial I finally adopted for the long distance stations in England and Canada is shown in Fig 22. This arrangement not only makes it possible to efficiently

* See also Lecture before The Royal Institution of Great Britain
by G. Marconi March 13 - 1908 -

which I have tried during my long-distance tests, are shown

in Figs.

The serial shown in Fig. consisted of a vertical

portion in the middle 200 feet wide 280 feet long supported by four towers and attached at the top to nearly horizontal

wires 200 in number and each 1000 feet long, extending

radially all round and supported at a height of 180 feet from

the ground by an inner circle of 8 and an outer circle of

16 masts.

The natural period of oscillation of this serial

system gave a wave length of 18,000 feet. Experiments were

made with this arrangement in 1905 and with a wave length of

12,000 signals, although very weak, could be received across

the Atlantic by day as well as by night.

The system of serial I finally adopted for the

long distance stations in England and Canada is shown in Fig

This arrangement not only makes it possible to efficiently

Serial I was used for the long distance stations in England and Canada in 1905 and 1906.

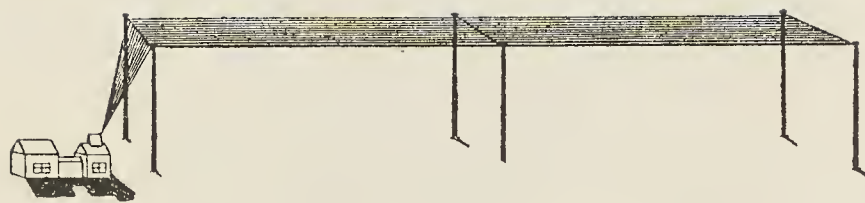


Fig. 22

radiate and receive waves of any desired length, but it also tends to confine the main portion of the radiation to a given direction. The limitation of transmission to one direction is not very sharply defined, but the results obtained with this type of aerial are nevertheless exceedingly useful.

Many suggestions respecting methods for limiting the direction of radiation have been made by various workers, notably by Professor Braun, Arton and Bellini Tosi.

In a paper read before the Royal Society of London in March 1906, ** showed how it was possible* I ~~stated that~~ by means of horizontal aerials ~~it was possible~~ to mainly confine to the direction of their *vertical* ~~horizontal~~ plane, pointing away from their earthed end, the emitted radiations.

In a similar manner it is possible to locate the bearing or direction of a sending station.

The transmitting circuits at the long distance stations are arranged in accordance with a comparatively

** on Methods whereby the Radiation of Electric waves may be mainly confined etc.
Proc of the Royal Society A Vol 33, 1906 —*

radiate and receive waves of any desired length, but it also tends to confine the main portion of the radiation to a given direction. The limitation of transmission to one direction is not very sharply defined, but the results obtained with this type of aerial are nevertheless exceedingly useful.

Many suggestions respecting methods for limiting the direction of radiation have been made by various workers, notably by Professor Franz, Arton and Bellini Tosi.

In a paper read before the Royal Society of London in March 1906, I stated that by means of horizontal aerials it was possible to mainly confine to the direction of their horizontal plane, pointing away from their earthed end, the emitted radiations.

In a similar manner it is possible to locate the bearing or direction of a sending station.

The transmit line circuits at the low distance stations are arranged in accordance with a comparatively

in order to receive the radiation from the station at the low distance

recent system for producing continuous or slightly damped oscillations, which I referred to in a Lecture before the Raoyal Institution of Great Britain on March 13th. 1908.

An insulated metal disc A (Fig. 23) is caused to rotate at a high rate of speed by means of an electric motor or steam turbine. Adjacent to this disc, which I will call the middle disc, are placed two other discs C' and C'' which may be called polar discs, and which are also revolved. These polar discs have their peripheries very close to the surface of edges of the middle disc. The two polar discs are connected by rubbing contacts to the outer ends of two condensers K, joined in series, and these condensers are also connected through suitable brushes to the terminals of a generator which should be a high tension continuous current generator.

On the middle disc a suitable brush or rubbing contact is provided and between this contact and the middle point of the two condensers an oscillating circuit is inserted, consisting of a condenser E in series with an inductance which last

recent system for producing oscillations or slightly damped oscillations, which I referred to in a lecture before the Royal Institution of Great Britain on March 18th, 1908.

An insulated metal disc A (Fig.) is caused

to rotate at a high rate of speed by means of an electric motor or steam turbine. Adjacent to this disc, which I will call the middle disc, are placed two other discs C and D which may be called polar discs, and which are also revolved. These polar discs have their peripheries very close to the surface of edges of the middle disc. The two polar discs are connected by rubbing contacts to the outer ends of two condensers E, joined in series, and these condensers are also connected through suitable brushes to the terminals of a generator which should be a high tension continuous current generator.

On the middle disc a suitable brush or rubbing contact

is provided and between this contact and the middle point of the two condensers an oscillating circuit is inserted, consisting of a condenser F in series with an inductance which last

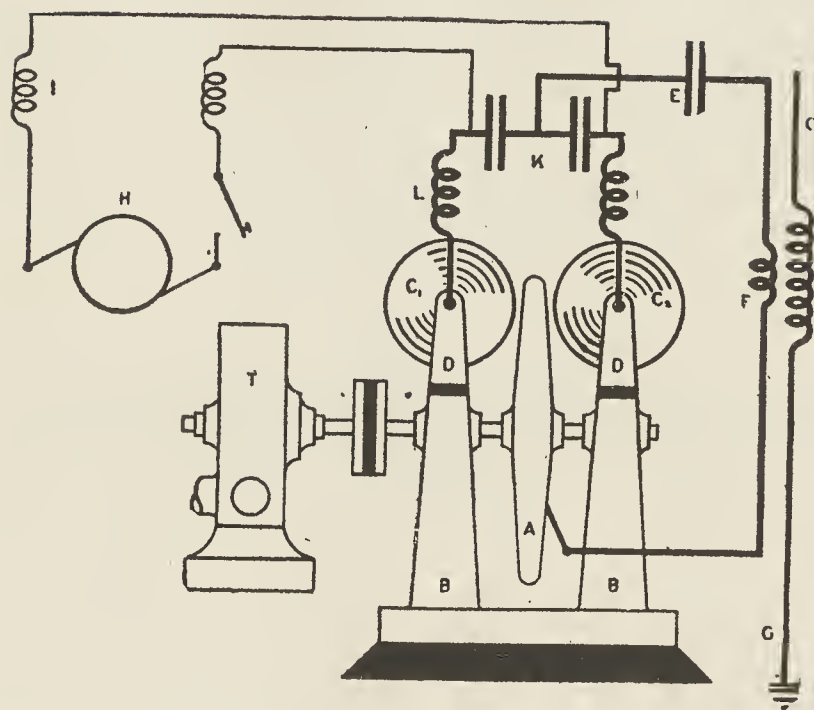


Fig. 23

is inductively connected with the radiating antennae.

The apparatus works probably in the following manner:-

The generator charges the double condenser, making the potential of the discs, say C' positive and C'' negative. The potential, if high enough, will cause a discharge to pass across one of the gaps, say between C' and A. This charges the condenser E through the inductance F, and starts oscillations in the circuit. The charge of F in swinging back will jump from A to C', the potential of which is of opposite sign to A, the dielectric strength between C'' and A having meanwhile been restored by the rapid motion of the disc, driving away the ionized air.

The Condenser E therefore discharges and recharges alternatively in reverse directions, the same process going on so long as energy is supplied to the condensers K by the generator H.

is indirectly connected with the rotating antenna.

The apparatus works probably in the following

manner:-

The generator charges the double condenser, making the potential of the disc, say C' positive and C" negative. The potential, if high enough, will cause a discharge to pass across one of the gaps, say between C' and A. This charges the condenser E through the inductance W, and starts oscillations in the circuit. The charge of W in swinging back will jump from A to C', the potential of which is of opposite sign to A, the dielectric strength between C" and A having meanwhile been restored by the rapid motion of the disc, driving away the ionized air.

The condenser E therefore discharges and

recharges alternately in reverse directions, the same process going on so long as energy is supplied to the condensers A by the generator H.

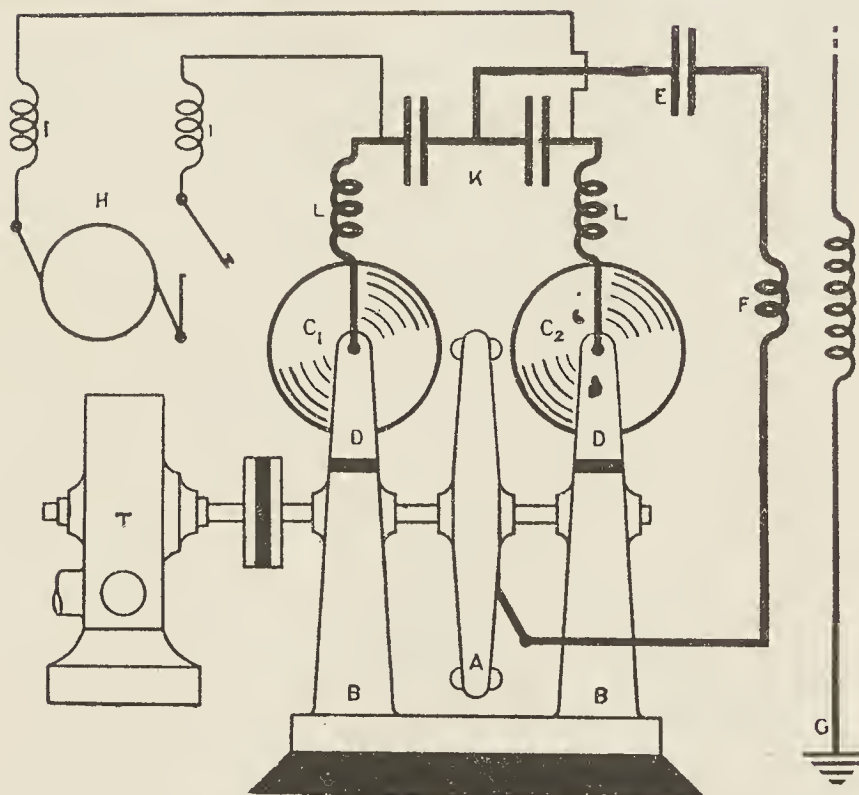


Fig. 24

It is clear that the discharges between C' and C" and A are never simultaneous as otherwise the centre electrode would not be alternatively positive and negative.

The best results have, however, been obtained by an arrangement as shown in Fig. 24 in which the active surface of the middle disc is not smooth, but consists of a number of regularly spaced copper knobs or pegs, at the ends of which the discharges take place at regular intervals.

In this way it is possible to cause the groups of oscillations radiated to reproduce a high and clear musical note in a receiver, and thereby it is easier to differentiate between the signals emanating from the sending station and noises caused by atmospheric electrical discharges. By this method very efficient resonance can be also obtained in appropriately designed receivers.

With regard to the receivers employed, important changes have taken place. By far the larger portion of

It is clear that the discharges between C' and C''

and A are never simultaneous and otherwise the centre electrode would not be alternately positive and negative.

The best results have, however, been obtained by

an arrangement as shown in Fig. in which the active

surface of the middle disc is not smooth, but consists of a number of regularly spaced copper knobs or pegs, at the ends of which the discharges take place at regular intervals.

In this way it is possible to cause the groups of oscillations radiated to reproduce a high and clear musical note in a receiver, and thereby it is easier to differentiate between the signals emanating from the sending station and noises caused by atmospheric electrical discharges. By this method very efficient resonance can be also obtained in appropriately designed receivers.

With regard to the receivers employed, important

changes have taken place. By far the larger portion of

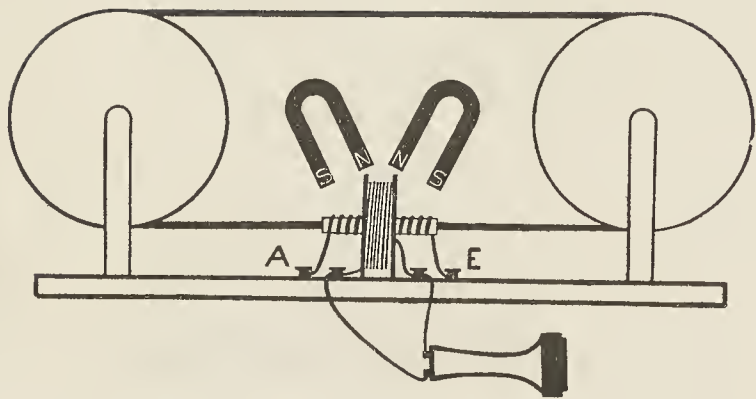


Fig. 25

of electric wave telegraphy was, until a few years ago, conducted by means of some form or other of Coherer, or variable contact either requiring tapping or else self restoring.

At the present day however I may say that at all the Stations controlled by my Company my Magnetic Receiver is almost exclusively employed. * *ES 25*

This receiver is based on the decrease of magnetic hysteresis which occurs in iron when under certain conditions this metal is subjected to the effects of electrical waves of high frequency.

It has recently been found possible to increase the sensitiveness of these receivers, and to apply them in connection with a high speed relay, so as to record messages at great speed.

A remarkable fact not generally known in regard to transmitters is, that none of the arrangements employing condensers exceed in efficiency the plain elevated aerial or

* *Proc of the Royal Society - Note on a Magnetic detector of Electric waves - J Marconi Vol LXX p 341. 1902*

of electric wave telegraphy was, until a few years ago, controlled by means of some form or other of generator, or variable contact either requiring tapping or else self restoring.

At the present day however I may say that at all the stations controlled by my Company my Magnetic Receiver is almost exclusively employed. ★

This receiver is based on the discovery of magnetic

hysteresis which occurs in iron when under certain conditions this metal is subjected to the effects of electrical waves of high frequency.

It has recently been found possible to increase the

sensitiveness of these receivers, and to apply them in connection with a high speed relay, so as to record messages at great speed.

A remarkable fact not generally known in regard to transmitters is, that none of the arrangements employing condensers exceed in efficiency the plain eleventh series or

This is the first time that a Magnetic Receiver has been used in a high speed relay.
2nd Edition - 1904

vertical wire discharging to earth through a spark gap, as used in my first experiments. — *Figs 2 and 3*

I have recently been able to confirm the statement made by Professor Fleming in his book *on the Principles of Electric Wave Telegraphy* ¹⁴⁰⁶ that with a power of 8 Watts in the aerial it is possible to communicate to ~~a~~ distance of over 100 miles. ₇

I have also found that by this method it is possible to send signals 2000 Miles across the Atlantic, with a smaller expenditure of energy than by any other method known to myself.

The only drawback to this arrangement is, that unless very large aerials are used, the amount of energy which can be efficiently employed is limited by the potential beyond which brush discharges and the resistance of the spark gap begin to have a deleterious effect.

By means of spark gaps in compressed air and the

vertical wire discharging to earth through a spark gap, as

used in my first experiments.

I have recently been able to confirm the statement

made by Professor Fleming in his book *The Wireless* that

it is possible to communicate to a distance of over 100 miles with a power of 8 Watts in the aerial.

I have also found that by this method it is possible

to send signals 2000 Miles across the Atlantic, with a smaller expenditure of energy than by any other method known to myself.

The only drawback to this arrangement is, that

unless very large aerials are used, the amount of energy

which can be efficiently employed is limited by the potential

beyond which brush discharges and the resistance of the spark

gap begin to have a deleterious effect.

By means of spark gaps in compressed air and the

addition of inductance coils placed between the aerial and earth, the system can be made to radiate very pure and slightly damped waves, eminently suitable for sharp tuning.

In regard to the general working of wireless telegraphy, the generalization of the system and the multiplicity of the stations, have greatly facilitated the observation of facts not easily explainable.

Thus an ordinary ship station, utilizing about $\frac{1}{2}$ a Kilowatt of electrical energy, the normal ~~range~~^{range} of which is not greater than 200 Miles, will occasionally transmit messages across a distance of over 1200 Miles. It often occurs that a ship fails to communicate with a nearby station, but can correspond with perfect ease with a distant one.

Thus on many occasions last winter, the S.S. "Caronia" of the Cunard Line, carrying a station utilizing about $\frac{1}{2}$ a Kilowatt, when in the Mediterranean, on the coast of Sicily, failed to obtain communication with the

addition of inductance coils placed between the aerial and

earth, the system can be made to radiate very pure and slightly damped waves, entirely suitable for sharp tuning.

In regard to the general working of wireless

telegraphy, the generalization of the system and the multiplicity of the stations, have greatly facilitated the observation of facts not easily explainable.

Thus an ordinary ship station, utilizing about

1/2 a kilowatt of electrical energy, the normal ~~XXXX~~ ^{XXXX} of which

is not greater than 200 miles, will occasionally transmit

messages across a distance of over 1200 miles. It often occurs

that a ship fails to communicate with a nearby station, but

can correspond with perfect ease with a distant one.

Thus on many occasions last winter, the S.S.

"Gloria" of the Grand line, carrying a station utilizing

about 1/2 a kilowatt, when in the Mediterranean, on the

coast of Sicily, failed to obtain communication with the

Italian Stations, but had no difficulty whatsoever in transmitting and receiving messages to and from the Coasts of England and Holland, although these latter stations were considerably more than 1000 Miles away, and a large part of the continent of Europe and the Alps lay between them and the ship.

Although high power stations are ^{now} used for communicating across the Atlantic, and messages can be sent by day as well as by night, there still exists short periods of daily occurrence, during which transmission from England to America ~~or~~ viceversa is difficult. Thus in the morning and evening, when, ^{in consequence of} ~~due to~~ the difference in longitude, daylight or darkness extend only part of the way across the ocean, the received signals are weak and sometimes cease altogether. It would almost appear as if electric waves in passing from dark space to illuminated space, and viceversa, were reflected or refracted in such a manner as to ^{be deviated from their} ~~deflect the radiated~~ ~~energy from its~~ normal path.

guide

It is probable that these difficulties would not be experienced in telegraphing over equal distances north and south, on about the same meridian, as in this case the passage from daylight to darkness would occur almost simultaneously over the whole ~~space~~ ^{distance} between the two points.

Another curious result, on which hundreds of observations continued for years leave no further doubt, is that regularly, for short periods, at sunrise and sunset, and occasionally at other times, a shorter wave can be detected across the Atlantic in preference to the longer wave normally employed.

Thus at Clifden and Glace Bay, when sending on an ordinary coupled circuit arranged so as to simultaneously radiate two waves, one 12.500 feet and the other 14.700 feet, although the longer wave is the one usually received at the other side of the ocean, regularly, about ~~two~~ ^{three} hours after sunset at Clifden, and sunrise at Glace Bay, the shorter wave alone would be received with remarkable

It is probable that these difficulties would not be experienced in telegraphing over equal distances north and south, or about the same meridian, as in this case the passage from daylight to darkness would occur almost simultaneously over the whole space between the two points.

Another curious result, on which hundreds of observations continued for years leave no further doubt, is that regularly, for short periods, at sunrise and sunset, and occasionally at other times, a shorter wave can be detected across the Atlantic in preference to the longer wave normally employed.

Thus at Clifden and Glace Bay, when sending on an ordinary coupled circuit arranged so as to simultaneously radiate two waves, one 12,500 feet and the other 14,700 feet, although the longer wave is the one usually received at the other side of the ocean, regularly, about ~~the~~ hours after sunset at Clifden, and sunrise at Glace Bay, the shorter wave alone would be received with remarkable

strength, for a period of about one hour.

This effect occurred so regularly that the operators tuned their receivers to the shorter wave at the times mentioned, as a matter of ordinary routine.

With regard to the utility of Wireless Telegraphy, there is no doubt that its use has become a necessity for the safety of shipping, all the principal Liners and warships being already equipped, ~~and~~ its extension to less important ships being only a matter of time, in view of the use it has proved to be in cases of danger.

Its use is also increasing as a means of communication between outlying islands, and ^{also} for the ordinary purposes of telegraphic communication, especially in the Colonies and in newly developed countries.

However great may be the importance of Wireless Telegraphy to ships and shipping, I believe it is destined

strength, for a period of about one hour.

This effect occurred so regularly that the operators

turned their receivers to the shorter wave at the time

mentioned, as a matter of ordinary routine.

With regard to the utility of Wireless Telegraphy,

there is no doubt that its use has become a necessity for the safety of shipping, with the principal liners and warships being already equipped, and its extension to less important ships being only a matter of time, in view of the use it has proved to be in cases of danger.

Its use is also increasing as a means of communication between outlying islands, and for the ordinary purposes of telegraphic communication, especially in the colonies and in newly developed countries.

However great may be the importance of Wireless Telegraphy to ships and shipping, I believe it is destined

to an equal position of importance in furnishing efficient and economical communication between distant parts of the world and in connecting European Countries with their Colonies and with America.

Whatever may be its present shortcomings and defects there can be no doubt that Wireless Telegraphy even over great distances has come to stay, and will not only stay, but continue to advance.

If it should become possible to transmit waves right round the world ~~to the antipodes~~, it may be found that, the electrical energy travelling round all parts of the globe may be made to concentrate at the antipodes of the sending station. In this way it may some day be possible for messages to be sent to such distant lands by means of a very small amount of ~~energy~~ electrical energy, and therefore at a correspondingly small expense.

But I am leaving the regions of fact, and entering

to an equal position of importance in furnishing efficient
and economical communication between distant parts of the world
and in connecting European countries with their colonies and
with America.

Whatever may be its present shortcomings and defects
there can be no doubt that Wireless Telegraphy even over
great distances has come to stay, and will not only stay,
but continue to advance.

It should become possible to transmit waves
right round the world ~~by the same method~~, it may be found that
the electrical energy travelling round all parts of the globe
may be made to concentrate at the antipodes of the sending
station. In this way it may some day be possible for messages
to be sent to such distant lands by means of a very small
amount of ~~wireless~~ electrical energy, and therefore at a
correspondingly small expense.

But I am leaving the regions of fact, and entering

the regions of speculation, which, however, with the
knowledge ~~we have~~ gradually gained on the subject, promise results
both useful and instructive.

the regions of speculation, which, however, with the
knowledge gradually gained on the subject, promise results
both useful and instructive.





